



Dynapac DFP6


Plate compactors





Technical data

 Masses	
Basic mass	64 kg
Operating mass (CE)	65 kg

 Traction	
Max. gradeability	30 %
Max. working speed	25 m/min

 Compaction	
Frequency	90 Hz
Centrifugal force	10 kN
Amplitude	1.01 mm

 Engine	
Manufacturer/Model	Honda GX 120
Emissions according to	CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	0.9 l
Fuel tank capacity	2 l
Power	2.6 kW at 3600 rpm
Water tank capacity	13.5 l

 Drive system	
Drive system	Mechanical

Find us locally at www.dynapac.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DFP6

Plate compactors



Technical data

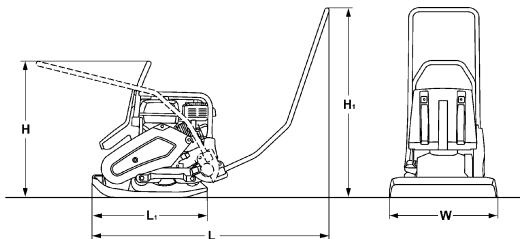

Dimensions	
H. Height	658 mm
H1. Height	962 mm
H2. Height	700 mm
L. Length	1084 mm
L1. Length	532 mm
W. Basic plate width	350 mm



Standard equipment

- Base plate in highly wear resistant material
- Foldable steering handle with vibration insulation
- Detachable steering handle
- Automatic shutdown at low oil level
- Engine protection frame
- V-belt protection cover
- Recoil starter
- Carrying handles
- One point lift



Optional equipment

- Comfort handle
- Water sprinkler system (+10 kg)
- Transport wheels (+4kg)
- Plastic mat
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.