Dynapac DRP15X

OPINAPAC

Plate compactors



Technical data

Masses	
Basic mass	137 kg
Operating mass	140 kg

Traction	
Max. gradeability	30 %
Max. working speed	25 m/min

***	Compaction	
	Frequency	85 Hz
	Centrifugal force	25 kN
	Amplitude	1.31 mm
	Water tank volume	13.5

Engine	
Manufacturer/Model	Honda GX 160
Emissions according to	CARB Phase III
Туре	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.11
Fuel tank capacity	31
Power	3.6 kW @ 3600 rpm


Drive system	
Drive system	Mechanical

Dynapac DRP15X





Technical data

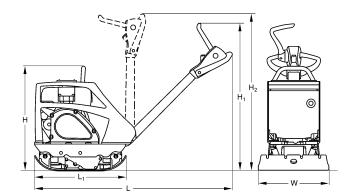

Dimensions	
H. Height	660 mm
H1. Height	870 mm
H2. Height	1220 mm
L. Length	1460 mm
L1. Length	650 mm
W. Basic plate width	500 mm



Standard equipment

- Durable base plate

- One lever control
 Low vibration steering rod adjustable in height
 Steering rod lock in transport and working position
- Vibration and throttle regulation on the steering rod

- Reverse drive protection
 All around protection hood
 All around protection for V-belt
- Automatic decompression
- Recoil starter



Optional equipment

- Water sprinkler system (+13kg)
- Transport wheels (+4 kg)
- Plastic mat Service Kit