



Dynapac DRP20


Plate compactors





Technical data

 Masses	
Basic mass	202 kg
Operating mass	205 kg

 Traction	
Max. gradeability	32 %
Max. working speed	27 m/min

 Compaction	
Frequency	80 Hz
Centrifugal force	35 kN
Amplitude	1.3 mm

 Engine	
Manufacturer/Model	Honda GX 160
Emissions according to	CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.1 l
Fuel tank capacity	3.60 l
Power	3.6 kW @ 3600 rpm

 Drive system	
Drive system	Mechanical

Find us locally at www.dynapac.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DRP20

Plate compactors



Technical data

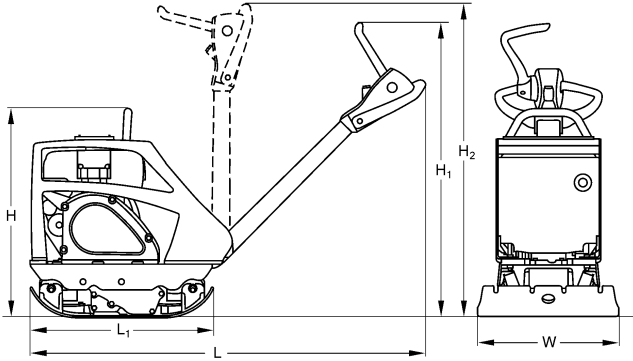

Dimensions	
H. Height	647 mm
H1. Height	820 mm
H2. Height	1220 mm
L. Length	1510 mm
L1. Length	762 mm
W. Basic plate width	600 mm



Standard equipment

- Durable base plate
- One lever control
- Low vibration steering rod adjustable in height
- Steering rod lock in transport and working position
- Vibration and throttle regulation on the steering rod
- Automatic shutdown at low oil level
- Reverse drive protection
- All around protection hood
- All around protection for V-belt
- Recoil starter
- Hour Meter



Optional equipment

- Heavy duty protection hood (+10 kg)
- Transport wheels (+5 kg)
- Plastic mat
- Service kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.