

Dynapac CC1300C VI

Combi rollers



Technical data



Masses

Max. operating mass	4600 kg
Operating mass (incl. ROPS)	3700 kg
Module mass (front/rear)	1855 kg/1845 kg



Compaction

Wheel load	464 kg/wheel
Static linear load	14.3 kg/cm
Water tank	298 l
Emulsion tank	25 l



Compaction (Single amplitude)

Centrifugal force	38/31 kN
Nominal amplitude	0.5 mm
Vibration frequency	54/49 Hz



Compaction (Dual amplitude)

Centrifugal force (high/low amplitude)	38/21 kN
Nominal amplitude (high/low)	0.5/0.2 mm
Vibration frequency	54/61 Hz



Traction

Speed range	0-9 km/h
Vertical oscillation	±10°
Max. theoretical gradeability	41 %



Engine

Manufacturer/Model	Kubota V2203-M (IIIA)
Type	Water cooled diesel engine
Rated power, SAE J1995	35 kW (48 hp) @ 2700 rpm
Fuel tank capacity	60 l



Engine

Manufacturer/Model	Kubota V2403-CR E4B (T4)
Type	Water cooled diesel engine
Rated power, SAE J1995	37.0 kW (50 hp) @ 2700 rpm



Engine

Manufacturer/Model	Kubota V2403-CR E5B (StageV)
Type	Water cooled diesel engine
Rated power, SAE J1995	37 kW (50.0 hp) @ 2700 rpm



Hydraulic system

Driving	Axial piston pump with variable displacement. Radial piston motors with constant displacement.
Vibration	Gear pump/motors with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake on drum and wheels.

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_cc1300c_vi_en-20201019.095750.pdf 2020-10-19 09:57

Dynapac CC1300C VI

Combi rollers



Technical data

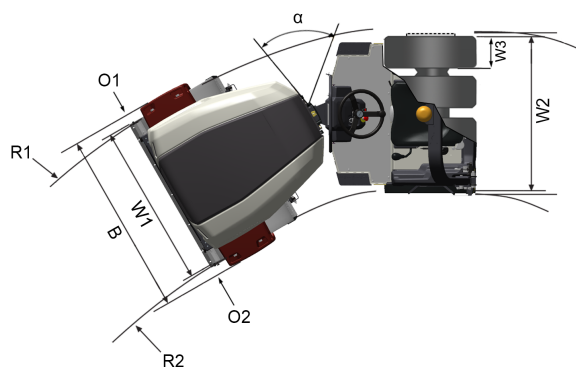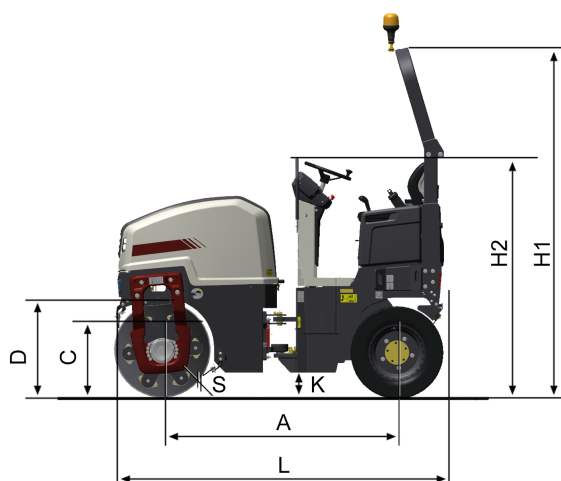

Dimensions	
A. Wheelbase	1970 mm
B. Width	1425 mm
C. Curb clearance	690 mm
D. Drum diameter	880 mm
H1. Height, with ROPS	2855 mm
H2. Height, w/o ROPS	2025 mm
K. Ground clearance	190 mm
L. Length	2830 mm
O. Off-set	50 mm
O1. Overhang, right	62.5 mm
O2. Overhang, left	62.5 mm
R1. Turning radius, outside	4330 mm
R2. Turning radius, inside	3030 mm
S. Drum shell thickness	16 mm
W1. Drum width	1300 mm
W2. Width, wheel module	1282 mm
W3. Width, tyre	285 mm
α . Steering angle	$\pm 30^\circ$

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_cc1300c_vi_en-20201019.095750.pdf 2020-10-19 09:57