

Dynapac CC4200 VI

Double drum vibratory rollers



Technical data



Masses

| | |
|-----------------------------|-----------------|
| Max. operating mass | 13150 kg |
| Operating mass (incl. ROPS) | 10000 kg |
| Module mass (front/rear) | 5000 kg/5000 kg |



Traction

| | |
|-------------------------------|-----------|
| Speed range | 0-12 km/h |
| Vertical oscillation | ±7° |
| Max. theoretical gradeability | 40 % |



Compaction

| | |
|--|--|
| Centrifugal force (high/low amplitude) | 128 kN/84 kN |
| Nominal amplitude (high/low) | 0.8 mm /0.3 mm |
| Static linear load (front/rear) | 29.8 kg/cm /29.8 kg/cm |
| Vibration frequency (high/low amplitude) | 51 Hz/67 Hz |
| Water tank volume | 680 liters /(880 liters w. opt. watert.) |
| Water tank volume (front drum steering) | 740 liters |



Compaction (CE)

| | |
|--|--------------|
| Centrifugal force (high/low amplitude) | 113 kN/69 kN |
| Vibration frequency (high/low amplitude) | 48 Hz/61 Hz |



Engine

| | |
|------------------------|-----------------------------|
| Manufacturer/Model | Cummins F3.8 V |
| Type | Water cooled turbo diesel |
| Rated power, SAE J1995 | 100 kW (135 hp) @ 2200 rpm |
| Fuel tank capacity | 180 l |
| DEF tank capacity | 15 l |



Engine

| | |
|------------------------|----------------------------|
| Manufacturer/Model | Cummins QSF 3.8 IV/T4f |
| Type | Water cooled turbo diesel |
| Rated power, SAE J1995 | 97 kW (130 hp) @ 2200 rpm |
| Fuel tank capacity | 180 l |
| DEF tank capacity | 15 l |



Engine

| | |
|------------------------|-----------------------------|
| Manufacturer/Model | Cummins QSF 3.8 IIIA/T3 |
| Type | Water cooled turbo diesel |
| Rated power, SAE J1995 | 104 kW (140 hp) @ 2200 rpm |



Hydraulic system

| | |
|-----------------------------|---|
| Driving | Axial piston pump with variable displacem. Rad. piston motors(2) with variable displacem. |
| Vibration | Axial piston pumps(2) with variable displacem. Axial piston motors(2) with const. displacem. |
| Steering | Gear pump with constant displacem. |
| Service brake | Hydrostatic in forward and reverse lever. |
| Parking/ Emergency brake | Failsafe multidisc brake in both drums. |

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_cc4200_vi_en-20210423.100353.pdf 2021-04-23 10:03

Dynapac CC4200 VI

Double drum vibratory rollers



Technical data

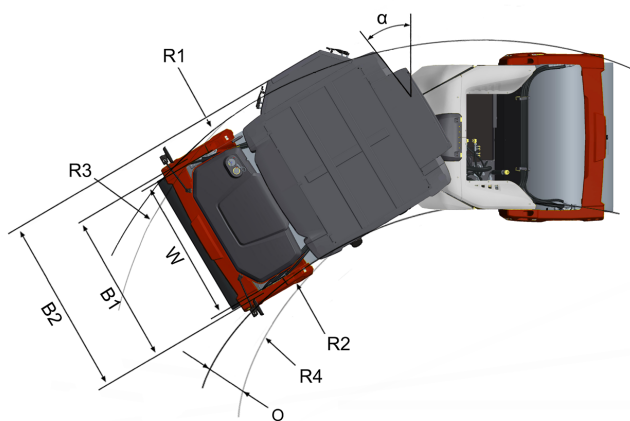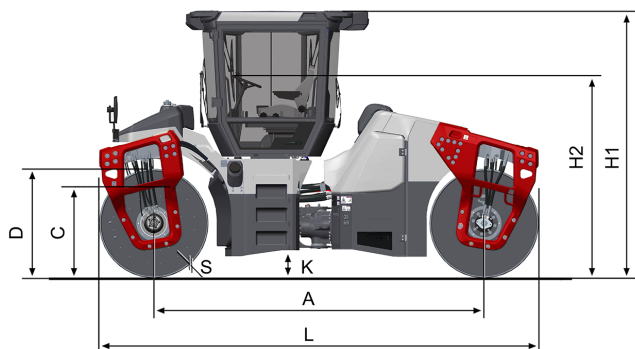

| Dimensions | |
|--|---------|
| A. Wheelbase | 3760 mm |
| B1. Width, front | 1910 mm |
| B2. Width, with cab | 2140 mm |
| C. Curb clearance | 815 mm |
| D. Drum diameter | 1300 mm |
| H. Height, with ROPS/cab | 2990 mm |
| K. Ground clearance | 310 mm |
| L. Length | 5060 mm |
| O. Off-set | 520 mm |
| R1. Turning radius, outside | 7270 mm |
| R2. Turning radius, inside | 5590 mm |
| R3. Turning radius with off-set, outside | 5460 mm |
| R4. Turning radius with off-set, inside | 3780 mm |
| S. Drum shell thickness | 20 mm |
| W. Drum width | 1680 mm |
| α. Steering angle | ±32° |

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.

dynapac_cc4200_vi_en-20210423.100353.pdf 2021-04-23 10:03