Dynapac CA3500DCO



Single drum vibratory rollers



Technical data

Masses Masses	
Operating mass (incl. Cab)	12200 kg
Module mass (front/rear)	7700/4500 kg
Max. operating mass	12500 kg

Dimensions	
Drum width	2130 mm

Compaction	ו	
Static linear	load	36 kg/cm
Amplitude		0 -2 mm
Vibration fre	quency	28 Hz
Centrifugal f	orce	261 kN

\Diamond	Hydraulic syst	em
	Driving	Hydrostatic
	Vibration	Hydrostatic
	Steering	Hydrostatic
	Service brake	Hydrostatic in forward and reverse lever.
	Parking/ Emergency brake	Failsafe multidisc brake in drum gear box and in rear axle.

Engine	
Manufacturer/Model	Cummins QSF3.8 (IV/4final)
Туре	Water cooled turbo Diesel
Rated power, SAE J1995	97 kW (130 hp) @ 2200 rpm
Fuel tank capacity	272
DEF tank capacity	20 I

Engine	
Manufacturer/Model	Cummins QSB4.5 (IIIA/3)
Туре	Water cooled turbo Diesel
Rated power, SAE J1995	97 kW (130 hp) @ 2200 rpm


Traction	
Vertical oscillation	±9°
Tyre size (8 ply)	23,1 x 26 AW
Theor. gradeability	55 %
Speed range	0 -12 km/h


Dynapac CA3500DCO



Single drum vibratory rollers

Technical data

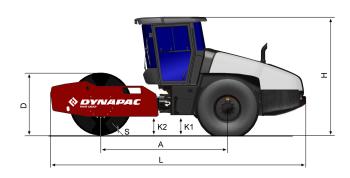

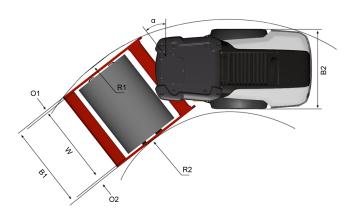

Dimensions	
A. Wheelbase	2990 mm
B1. Width, front	2304 mm
B2. Width, rear	2130 mm
D. Drum diameter	1520 mm
H1. Height, with ROPS/cab	2880 mm
H2. Height, w/o ROPS/cab	2130 mm
K1. Ground clearance	450 mm
K2. Curb clearance	450 mm
L. Length	5990 mm
O1. Overhang, right	87 mm
O2. Overhang, left	87 mm
R1. Turning radius, outside	5450 mm
R2. Turning radius, inside	3300 mm
S. Drum shell thickness	35 mm
W. Drum width	2130 mm
α. Steering angle	±38°