Dynapac CA5000DCO



Single drum vibratory rollers



Technical data

| Masses Masses | |
|----------------------------|------------------|
| Operating mass (incl. Cab) | 16250 kg |
| Module mass (front/rear) | 10800 kg/5450 kg |
| Max. operating mass | 16700 kg |

| Dimensions | |
|------------|---------|
| Drum width | 2130 mm |

| Compaction | |
|---------------------|----------|
| Static linear load | 50 kg/cm |
| Amplitude | 0-2 mm |
| Vibration frequency | 27 Hz |
| Centrifugal force | 280 kN |

| \Diamond | Hydraulic system | |
|------------|--------------------------------|---|
| | Driving | Hydrostatic |
| | Vibration | Hydrostatic |
| | Steering | Hydrostatic |
| | Service brake | Hydrostatic in forward and reverse lever. |
| | Parking/ Emergency brake | Failsafe multidisc brake in drum gear box and in rear axle. |

| Engine | |
|------------------------|---------------------------------|
| Manufacturer/Model | Cummins B4.5 (Stage V /T4final) |
| Туре | Water cooled turbo Diesel |
| Rated power, SAE J1995 | 149 kW (200 hp) @ 2200 rpm |
| Fuel tank capacity | 272 |
| DEF tank capacity | 37 |

| Engine | |
|------------------------|-----------------------------|
| Manufacturer/Model | Deutz TCD2012L06 (IIIA/3) |
| Туре | Water cooled turbo Diesel |
| Rated power, ISO 14396 | 128 kW (174 hp) @ 2200 rpm |


| Traction | |
|----------------------|-----------|
| Vertical oscillation | ±9° |
| Tyre size (12 ply) | 23,1 x 26 |
| Theor. gradeability | 56 % |
| Speed range | 0-12 km/h |


Dynapac CA5000DCO



Single drum vibratory rollers

Technical data

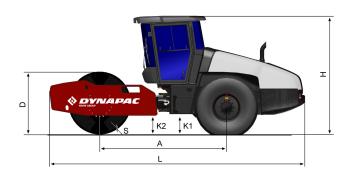

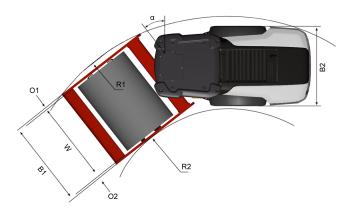

| Dimensions | |
|-----------------------------|---------|
| A. Wheelbase | 3100 mm |
| B1. Width, front | 2340 mm |
| B2. Width, rear | 2130 mm |
| D. Drum diameter | 1536 mm |
| H1. Height, with ROPS/cab | 2890 mm |
| H2. Height, w/o ROPS/cab | 2130 mm |
| K1. Ground clearance | 450 mm |
| K2. Curb clearance | 450 mm |
| L. Length | 6240 mm |
| O1. Overhang, right | 105 mm |
| O2. Overhang, left | 105 mm |
| R1. Turning radius, outside | 5800 mm |
| R2. Turning radius, inside | 3300 mm |
| S. Drum shell thickness | 43 mm |
| W. Drum width | 2130 mm |
| α. Steering angle | ±38° |