Dynapac F2500CS



Large pavers



Technical data

Masses	
Weight (incl. standard screed)	18 t

Dimensions	
Basic width	2.55 m
Working width, minimum (with reducing shoe)	2.05 m
Front ramp angle	15°
Working width, max.	9 m

B Capacity	
Placement thickness (max)	310 mm
Theoretical placement capacity	750 t/h

Material hopper	
Capacity	6.0 m ³
Dumping height (center/outside)	555 mm /560 mm
Hopper width, internal	3292 mm

Traction	
Maximum paving speed	30 m/min
Transport speed	4.0 km/h

Engine	
Emissions according to	Stage IIIA (Tier 3)
Rated power, SAE J1995	129 kW @ 2200 rpm with stepless rpm control
Electrical system	24 V
Fuel tank capacity	320 ا

Undercarriage	
Crawler length	2900 mm
Crawler width	320 mm

Conveyor	
Conveyor type	Dual bar feeder
Conveyor width	2 x 655 mm
Conveyor control	Automatic with limit switches


GGC Auger	
Auger diameter	380 mm
Auger control	Automatic with ultrasonic sensors

Dynapac F2500CS





Technical data

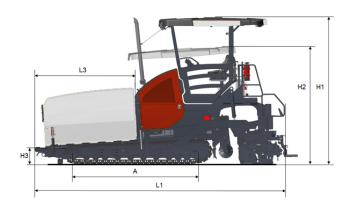



Dimensions	
A. Axle track	2900 mm
B1. Width, max.	3400 mm
B2. Width, standard	2550 mm
B3. Width, center of tracks	1992 mm
C1. Track width	320 mm
H1. Height, max.	3900 mm
H2. Height, transport	3100 mm
H3. Height	492 mm
L1. Length	6145 mm
L3. Length, hopper	2123 mm