







Dynapac SD2500CS


Large pavers





Technical data


 Masses	
Weight (incl. standard screed)	18.50 t
 Dimensions	
Basic width	2.55 m
Working width, max.	10 m
 Capacity	
Placement thickness (max)	310 mm
Theoretical placement capacity	800 t/h
 Undercarriage	
Crawler length	2.90 m
Final drive	Hydrostatic final drives with hydraulic motors and planetary gear box
 Traction	
Maximum paving speed	28 m/min

 Engine	
Manufacturer/Model	Cummins QSB6.7-C200
Emissions according to	EU Stage IIIA
Rated power, SAE J1995	142 kW @ 2200 rpm
Electrical system	24 V
Fuel tank capacity	350 l

 Engine	
Manufacturer/Model	Cummins QSB6.7-C200
Emissions according to	Stage V /US EPA T4f
Rated power, SAE J1995	149 kW @ 2200 rpm
DEF tank capacity	37 l
Electrical system	24 V
Fuel tank capacity	290 l

 Material hopper	
Capacity	6.0 m ³
Dumping height (center/outside)	555 mm /560 mm
Hopper width, internal	3.29 m

 Conveyor	
Conveyor type	Dual bar feeder
Conveyor control	Automatic with limit switches
Conveyor width	2 x 655 mm

 Auger	
Auger diameter	380 mm
Auger control	Automatic with ultrasonic sensors

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_sd2500cs_en-20210708.121507.pdf 2021-07-08 12:15

Dynapac SD2500CS

Large pavers



Technical data

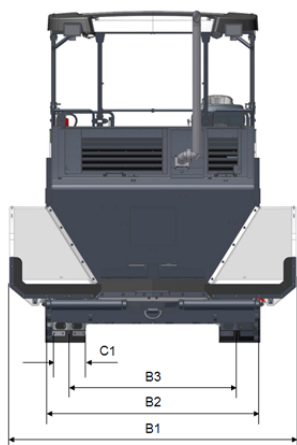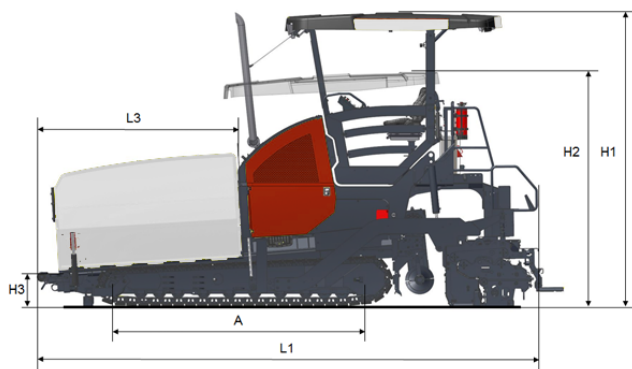

Dimensions

Working width, minimum (with reducing shoe)	2.05 m
Front ramp angle	15°
A. Axle track	2.90 m
B1. Width, max.	3.40 m
B2. Width, standard	2.55 m
B3. Width, center of tracks	1.99 m
C1. Track width	0.32 m
H1. Height, max.	3.90 m
H2. Height, transport	3.10 m
H3. Height	0.49 m
L1. Length	6.15 m
L3. Length, hopper	2.12 m



Suitable screeds

Model	Basic width	Working width, hydraulic extendable	Working width, max.	Compacting elements	Heating system
Dynapac V5100TV	2.55 m	5.10 m	8.80 m	Vertical impact tamper/Vibration	Propane (LPG)
Dynapac V5100TH-E	2.55 m	5.10 m	8.10 m	Vertical impact tamper /Vibration	Electric
Dynapac V6000TV	3.00 m	6.00 m	9.70 m	Vertical impact tamper/Vibration	Propane (LPG)
Dynapac V5100TVE	2.55 m	5.10 m	8.80 m	Vertical impact tamper /Vibration	Electrical
Dynapac R300TVE	3.00 m	N/A	14.00 m	Vertical impact tamper/Vibration	Electrical
Dynapac R300TV	3.00 m	N/A	14.00 m	Vertical stroke tamper /Vibration	Propane (LPG)
Dynapac V6000TVE	3.00 m	6.00 m	9.70 m	Vertical impact tamper/Vibration	Electrical
Dynapac V6000TH-E	3.00 m	6.00 m	9 m	Vertical impact tamper /Vibration	Electric

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.