




Dynapac V3500TVE


Screeds

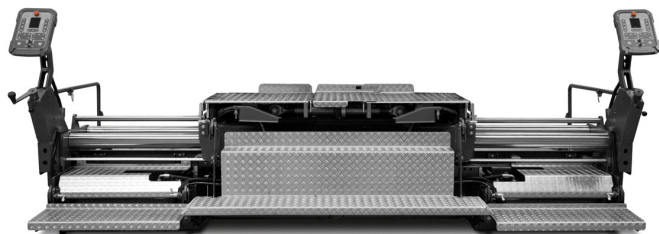


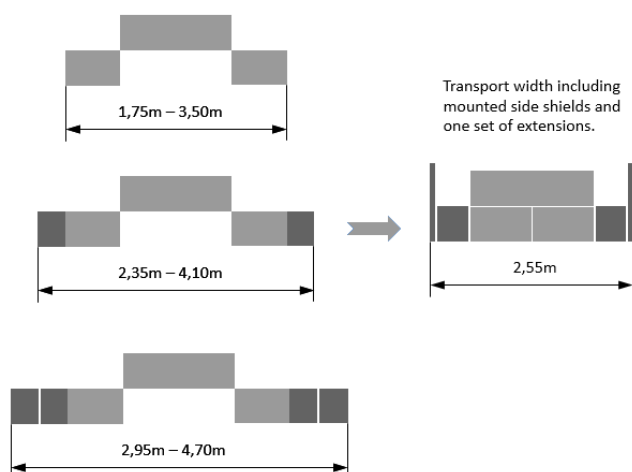
Technical data

 Masses	
Mass (basic width)	1620 kg
Extension boxes (300 mm)	165 kg
Side shields, x2	190 kg

 Dimensions	
Basic width	1.75 m
Working width, minimum (with reducing shoe)	0.70 m
Working width, hydraulic extendable	3.50 m
Working width, max.	4.70 m
Bottom plates thickness	12 mm
Extension boxes	300 mm

 Heating	
Heating system	Electric
Power, basic width	8.4 kW
Power, max width	12.7 kW
Control type	Zonal

 Compaction	
Compacting elements	Tamper and Vibration
Crown profile	-2.5% up to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm



Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_v3500tve_en-20180309.120900.pdf 2018-03-09 12:09