






# Dynapac V5100TV

## Screeds

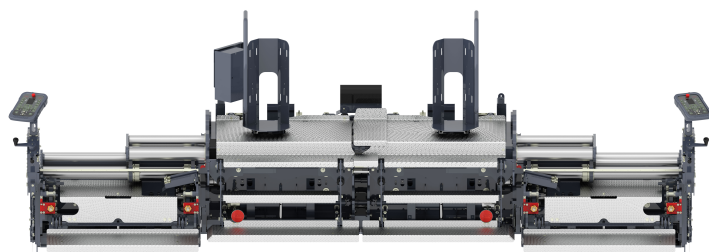

### Technical data

|  Masses      |         |
|---|---------|
| Mass (basic width)  | 3400 kg |
|  Dimensions |         |
| Basic width   | 2.55 m  |
| Working width, minimum (with reducing shoe)   | 2.05 m  |
| Working width, hydraulic extendable   | 5.10 m  |
| Working width, max.   | 8.80 m  |
| Bottom plates thickness   | 380 mm  |

|  Heating     |                                  |
|---|----------------------------------|
| Heating system  | Propane (LPG)                    |
|  Compaction |                                  |
| Compacting elements   | Vertical impact tamper/Vibration |
| Crown profile   | -2.5% up to +4.5%                |
| Tamper frequency  | 1500 rpm                         |
| Vibration frequency   | 3000 rpm                         |

Extensions: mm


Basic screed

2550

Extension parts

350

750

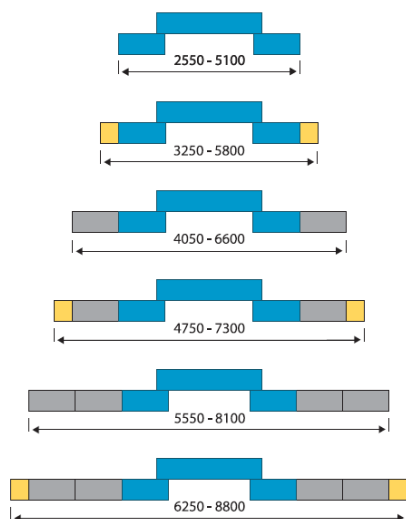

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.

dynapac\_v5100tv\_en-20180309.140004.pdf 2018-03-09 14:00