






Dynapac V5100TVE

Screeds

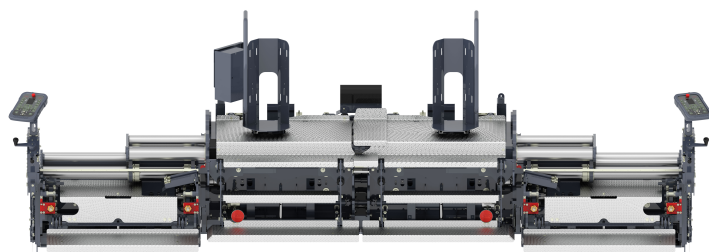

Technical data

 Masses	
Mass (basic width)	3400 kg
 Dimensions	
Basic width	2.55 m
Working width, minimum (with reducing shoe)	2.05 m
Working width, hydraulic extendable	5.10 m
Working width, max.	8.80 m
Bottom plates thickness	380 mm

 Heating	
Heating system	Electrical
 Compaction	
Compacting elements	Vertical impact tamper /Vibration
Crown profile	-2.5% up to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm

Extensions: mm


Basic screed

■ 2550

Extension parts

■ 350

■ 750

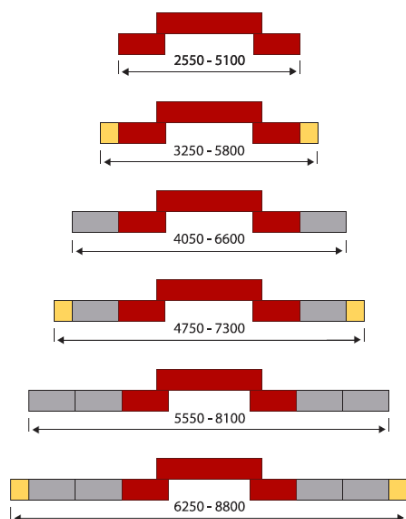

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_v5100tve_en-20171110.132627.pdf 2017-11-10 13:26