



# Dynapac V6000TV


## Screeds

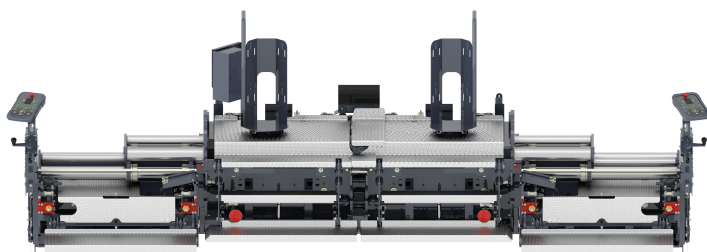


### Technical data


 Masses	
Mass (basic width)	3850 kg



  

 Dimensions	
Basic width	3.00 m
Working width, minimum (with reducing shoe)	2.50 m
Working width, hydraulic extendable	6.00 m
Working width, max.	9.70 m
Bottom plates thickness	380 mm

 Heating	
Heating system	Propane (LPG)

 Compaction	
Compacting elements	Vertical impact tamper/Vibration
Crown profile	-2.5% up to 4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm

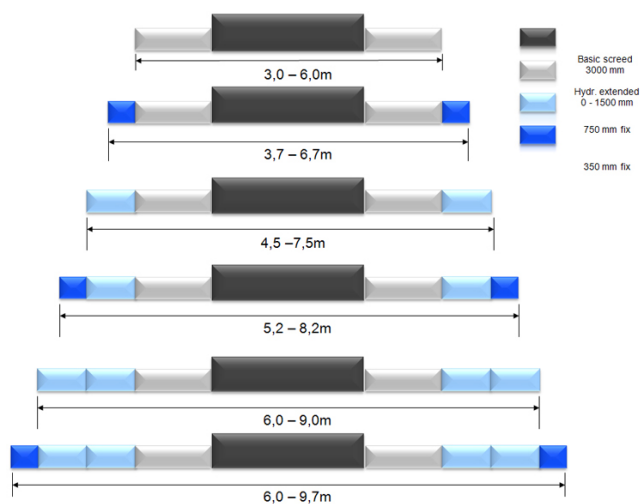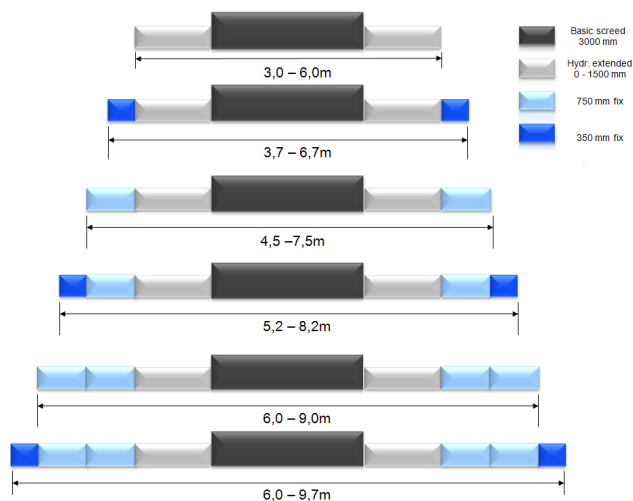

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.

dynapac\_v6000tv\_en-20180312.130831.pdf 2018-03-12 13:08