



Dynapac V6000TVH

Screeds

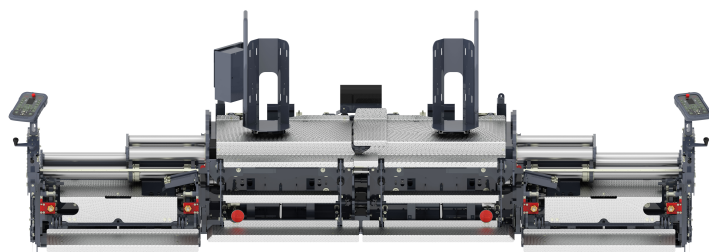


Technical data

 Masses	
Mass (basic width)	3990 kg

 Dimensions	
Basic width	3.00 m
Working width, minimum (with reducing shoe)	2.50 m
Working width, hydraulic extendable	6.00 m
Working width, max.	9.00 m
Bottom plates thickness	300 mm

 Heating	
Heating system	Electrical

 Compaction	
Compacting elements	Vertical impact tamper / Vibration and secondary compactor
Crown profile	-2.5% to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm


Extensions: mm

Basic screed

3000

Extension parts

750

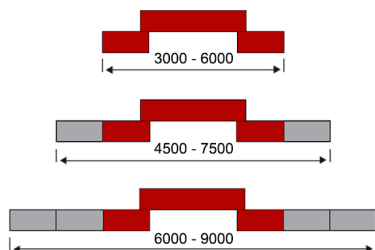

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_v6000tvh_en-20180529.105612.pdf 2018-05-29 10:56