

Dynapac F1250CS

Compact pavers



Technical data



Masses

Mass (incl. standard screed)	7.0 t
------------------------------	-------



Dimensions

Basic width	1.20 m
Working width, max.	3.50 m
Working width, hydraulic extendable	2.40 m
Working width, minimum (with reducing shoe)	0.50 m
Front ramp angle	14°



Capacity

Paving thickness (max/min)	200 /-150 mm
Theoretical placement capacity	300 t/h



Undercarriage

Crawler length	1400 mm
Crawler width	200 mm
Final drive	Direct drive over transmissions



Traction

Paving speed	up to 27 m/min
Transport speed	3.3 km/h



Operation

Operator console	Slidable left/right
Platform	Extendable platform



Engine

Manufacturer/Model	Deutz TD2.9 L4
Emissions according to	EU Stage V /EPA Tier 4f
Rated power	55.4 kW (75 hp) @2200 rpm
Electrical system	2 x 24V, 72 Ah
Fuel tank capacity	85 l



Engine

Manufacturer/Model	Deutz TD2.9 L4
Emissions according to	EU Stage III /EPA Tier 3
Rated power	54 kW (73hp) @2200 rpm
Electrical system	2 x 24V, 72 Ah
Fuel tank capacity	85 l



Material hopper

Capacity	2.5 m³ (5.5 t)
Dumping height, center	570 mm
Hopper width, internal	2830 mm



Conveyor

Conveyor type	Split drive conveyor with center cover
Conveyor width	620 mm
Conveyor control	Automatic with limit switches



Auger

Auger diameter	320 mm
Auger control	Automatic with ultrasonic sensor
Auger height adjustment	Infinitely variable by 150 mm

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.



dynapac_f1250cs_en-20210302.145406.pdf 2021-03-02 14:54

Dynapac F1250CS

Compact pavers



Technical data

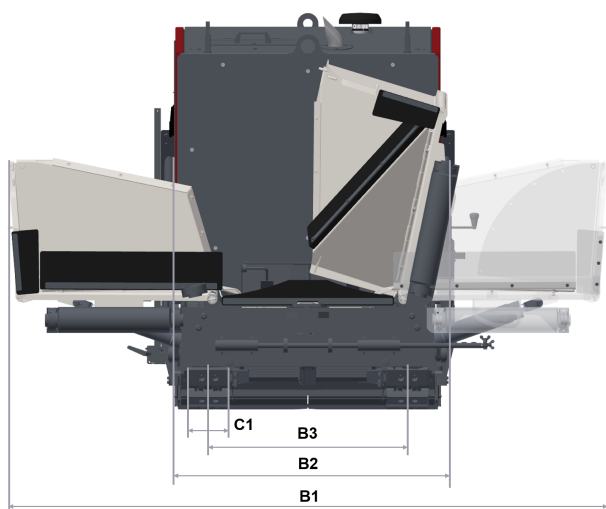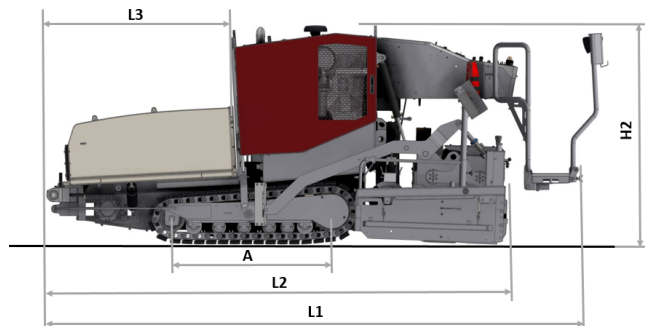

Dimensions

A. Axle track	1400 mm
B1. Width, max.	2820 mm
B2. Width, standard	1430 mm
B3. Width, center of tracks	940 mm
C1. Track width	200 mm
H2. Height, transport	2020 mm
L1. Length, total	4760 mm
L2. Length, transport	4450 mm
L3. Length, hopper	1640 mm



Standard equipment

2 front & 2 rear lights, Conventional electrics, , Dashboard with display and toggle switches, Eco Mode, Extendable steps operator platform, Hopper hydraulic separate control, Auger height adjustm., Conveyor reversible (splitted)with limit switches, Ultrasonic sensors auger



Optional equipment

Back-up alarm, Reduction shoes (0.5 working width), Working widths (3.1m + 3.5m), Emulsion spray equipment with pump and hose dispenser, Fire extinguisher, First aid kit, 4x LED lights, Light for auger compartment, Bio degradable hydraulic oil, Remote steering device, Rotating flashing beacon, Heatable side shields, Special painting,

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.