



# Dynapac DRP40DX


## Reversible plates




### Technical data

 Masses	
Basic mass	400 kg
Operating mass (W)	405 kg
Operating mass (W1)	390 kg
Operating mass (W2)	420 kg

 Traction	
Max. gradeability	35 %
Max. working speed	28 m/min

 Compaction	
Amplitude	1.85 mm
Centrifugal force	50 kN
Frequency	66 Hz

 Engine	
Manufacturer/Model	1B 40
Fuel consumption /h, avg.	1.50 m <sup>3</sup>
Fuel tank capacity	5 l
Power	6.7 kW @ 3000 rpm

 Drive system	
Drive system	Mechanical

Find us locally at [www.dynapac.com](http://www.dynapac.com)


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

# Dynapac DRP40DX

## Reversible plates



### Technical data

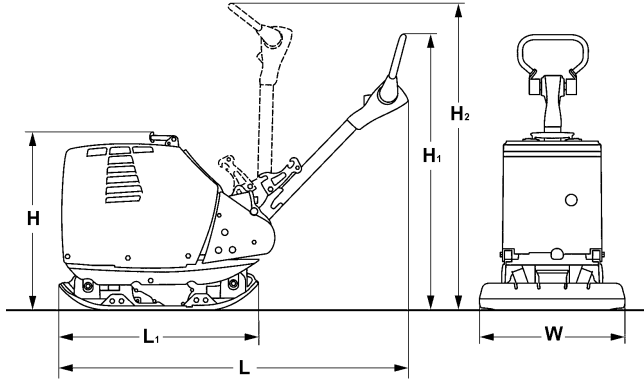

Dimensions	
H. Height	820 mm
H1. Height	980 mm
H2. Height	1350 mm
L. Length	1700 mm
L1. Length	900 mm
W. Basic plate width	550 mm (50 + 450 + 50)
W1. Plate width, without extensions	450 mm
W2. Plate width, with extensions	750 mm (150 + 450 + 150)



#### Standard equipment

- Control handle -comfort -with vibration isolation
- Height adjustable control lever
- Control lever lock in transport and working position
- Reverse drive protection
- Highly wear resistant base plate
- All around protection hood
- All around protection for V-belt
- Automatic decompression
- One point lift
- Recoil starter
- Electric starter
- Hour meter



#### Optional equipment

- Block paving mat
- Extension plate
- Service Kit

Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.