# **Dynapac DRQ15**

## Reversible plates





#### LONGEVITY

- Wear resistance characteristics of HARDOX maximizes the life-time
- of the base-plate.

  Open-style construction of the base-plate prevents the stones from getting stuck, thus reducing the wear & tear.

■ Robust all-around protection cage with solid one-point lift.

■ Low levels of hand arm vibration is made possible by the vibration damping solution.

#### **PRACTICAL**

■ Easy-open flaps to access daily check points like fuel tank cap, filter.

### **Technical data**

4	Masses	
	Basic mass	163 kg
	Operating mass	165 kg
<b>©</b>	Traction	
	Max. gradeability	20 %
	Max. working speed	25 m/min
***	Compaction	
	Amplitude	1.6 mm
	Centrifugal force	32 kN
	Frequency	83 Hz

Engine	
Manufacturer/Model	Honda GX 200
Emissions according to	Stage V & US EPA
Туре	Air cooled, petrol
Number of cylinders	1
Fuel consumption /h, avg.	1.30
Fuel tank capacity	3.10
Power	4.3 kW @ 3600 rpm




# **Dynapac DRQ15**

## Reversible plates



### **Technical data**

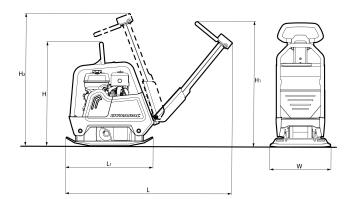

Dimensions	
H. Height	820mm
H1. Height	1100mm
L. Length	1350mm
L1. Length	720mm
W. Basic plate width	450/400mm



### Standard equipment

- Control handle -comfort -with vibration isolation
   Height adjustable control lever
   Control lever lock in transport position

- Reverse drive protection
  Highly wear resistant hardox base plate
  Protection hood
- All around protection for V-belt
- One point lift
   Recoil starter



### Optional equipment

- Block paving mat
- Service Kit