Dynapac DRQ25

Reversible plates





LONGEVITY

- Wear resistance characteristics of HARDOX maximizes the life-time
- of the base-plate.

 Open-style construction of the base-plate prevents the stones from getting stuck, thus reducing the wear & tear.

■ Robust all-around protection cage with solid one-point lift.

■ Low levels of hand arm vibration is made possible by the vibration damping solution.

PRACTICAL

■ Easy-open flaps to access daily check points like fuel tank cap, filter.

Technical data

4,	Masses	
	Basic mass	238 kg
	Operating mass	240 kg
(Traction	
	Max. gradeability	20 %
	Max. working speed	25 m/min
****	Compaction	
	Amplitude	1.7 mm
	Centrifugal force	38 kN
	Frequency	78 Hz

Engine	
Manufacturer/Model	Honda GX 200
Emissions according to	EU Stage V & US EPA
Туре	Air cooled, petrol
Number of cylinders	1
Fuel consumption /h, avg.	1.50 I
Fuel tank capacity	3.10 I
Power	4.3 kW @ 3600 rpm




Dynapac DRQ25





Technical data

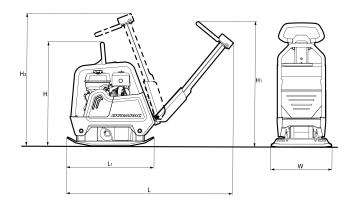

Dimensions	
H. Height	935mm
H1. Height	1110mm
H2. Height	1200mm
L. Length	1540mm
L1. Length	785mm
W. Basic plate width	500mm



Standard equipment

- Control handle -comfort -with vibration isolation
- Height adjustable control lever
 Control lever lock in transport position
- Reverse drive protection
- Highly wear resistant hardox base plate
 Protection hood
 All around protection for V-belt
 One point lift
 Recoil starter



Optional equipment

- Block paving mat
- Service Kit