



# Dynapac V6000TH-E

## Screeds

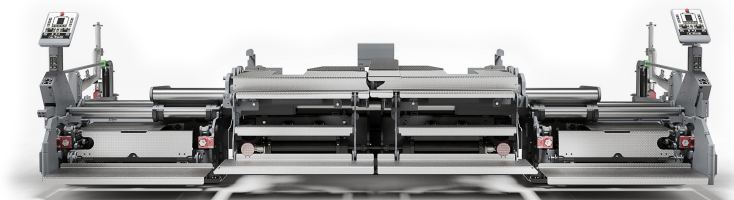


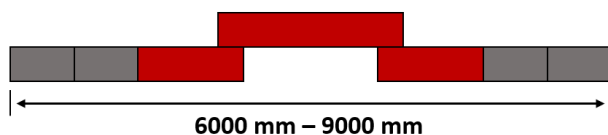
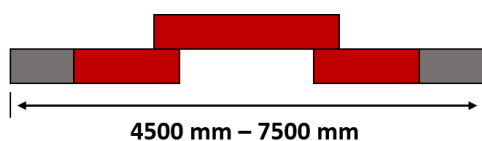
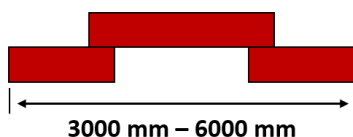
### Technical data

 Masses	
Mass (basic width)	4430 kg

 Dimensions	
Basic width	3.00 m
Working width, minimum (with reducing shoe)	2.50 m
Working width, hydraulic extendable	6.00 m
Working width, max.	9 m
Bottom plates thickness	300 mm

 Heating	
Heating system	Electric

 Compaction	
Compacting elements	Vertical impact tamper / Vibration
Crown profile	-2.5% to +4.5%
Tamper frequency	1500 rpm
Vibration frequency	3000 rpm
High Compaction Pressure Range	8 -70 Bar



Find us locally at [www.dynapac.com](http://www.dynapac.com)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac\_v6000th\_e\_en-20200504.131935.pdf 2020-05-04 13:19