



TEREX® | FINLAY



TF-75L

TF-75L LOW LEVEL FEEDER

SPECIFICATION:

Conveyor Length:	22.5m (73' 10")
Net Engine Power:	
Tier 3: Stage 3A CAT 4.4:	4 cylinder diesel engine developing 83kW(111hp) @1800rpm
Tier 4F/ Stage IV:	Caterpillar C4.4 - 4 cylinder diesel engine developing 82kW (110hp) @ 1800rpm
Portability:	Tracked

SPECIFICATION

POWERUNIT:

Tier 3: Stage 3A CAT 4.4 - 4 cylinder diesel engine developing 83kW (111hp) @1800rpm

Tier 4: Tier 4F / Stage IV - Caterpillar C4.4 - 4 cylinder diesel engine developing 82kW (110hp) @ 1800rpm

Fuel tank volume: 325litres

FEED CONVEYOR:

Capacity: 7m³ (9.2yds³)

Feed height: 1.9m (6' 3")

Feed in width(flares up): 3.49m (11' 5")

Drive: hydraulic variable speed drive via high torque gearbox

Speed: 0 – 11MPM (36ft / min)

Wearplate Hopper (No liners)

Hydraulic adjustable jacking legs mounted under hopper side to support weight

Twin drive feed conveyor

DISCHARGE CONVEYOR:

Conveyor Length: 22.5m (73' 10")

Belt Width: 1.2m (48")

Conveyor Drive: Variable speed Max 113m/min

Belt Type: EP400 3 ply, 4 + 2 plain belt

Optimum working angle: 18°

Optimum discharge height: 8.0m (26' 3")

Stockpile capacity at optimum working angle based on 37° angle of repose: 944m³ (1234yd³)

Max. working angle: 24°

Max. discharge height: 9.8m (32' 2")

Max Stockpile capacity based on 37° angle of repose: 1735m³ (2270m³)

Capacity: up to 600TPH

Based on 100mm Lump size at 18° work angle. Max belt speed.

Hydraulic discharge height adjustment

Hydraulic fold over for transport

Rosta scraper at head drum

UNDERCARRIAGE:

Undercarriage with heavy duty tracks. 4300mm centres, 400mm shoe.

ELECTRICAL

Hand held track control set with connection lead

Emergency stops x 3



Anti Roll Flaps




Dust Suppression



Full length Skirting



Overband Magnet

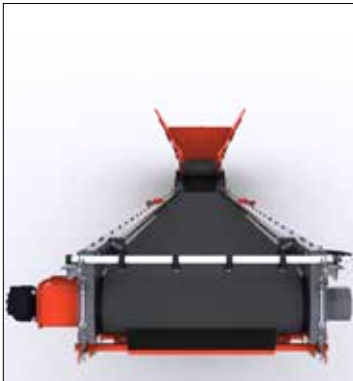

Skirting

GENERAL

Pinless deployment

Discharge head drum bearing automatic greasing cartridge

Engine prestart delay & siren

External conveyor belt adjustment

Orange-RAL2002. Special paint colour (if different from above). RAL must be specified on order

PACKAGING

Roll on Roll off transport (RoRo)

Containerisation, packed into 2 x 40ft high cube containers

OPTIONS

Upgrade to Toughflex EP 630 / Hyd duty recycling belt Feeder & Incline. (Only available on both Belts)

Telemetry System c/w 3 years data subscription (Belt Weigher Option recommended)(Unavailable for Tier 3)

TF-75L

OPTIONS

Canvas dust covers on discharge conveyor

Canvas dust covers complete with dust hood on discharge conveyor

Twin drive discharge conveyor

Full length side skirting along discharge conveyor

High spec discharge conveyor head drum scraper

Anti-roll back flaps

Discharge belt upgraded to 3ply heavy duty belt

Discharge conveyor drive drum upgraded to ceramic lagging

Discharge conveyor underguard option length of mid section

Dust suppression at discharge conveyor head drum

Belt weigher option

Overband magnet at feedboot of discharge conveyor

Radio remote to start / stop feeder, raise / lower discharge

Pull Cord E-stop running length of discharge Conveyor

Radio remote to Track machine

Feedboot lined 6mm wearplate

Conveyor fitted with Chevron belt 3 ply x 4+2 covers

Manual adjusting jacking legs at tail side of feeder to adjust tail height

Feed conveyor drive drum upgraded to ceramic lagging

Hopper lined 6mm wearplate


Hopper flares lined 6mm wearplate

Mild steel liners bolted into hopper

TRANSPORT DIMENSIONS



WORKING DIMENSIONS

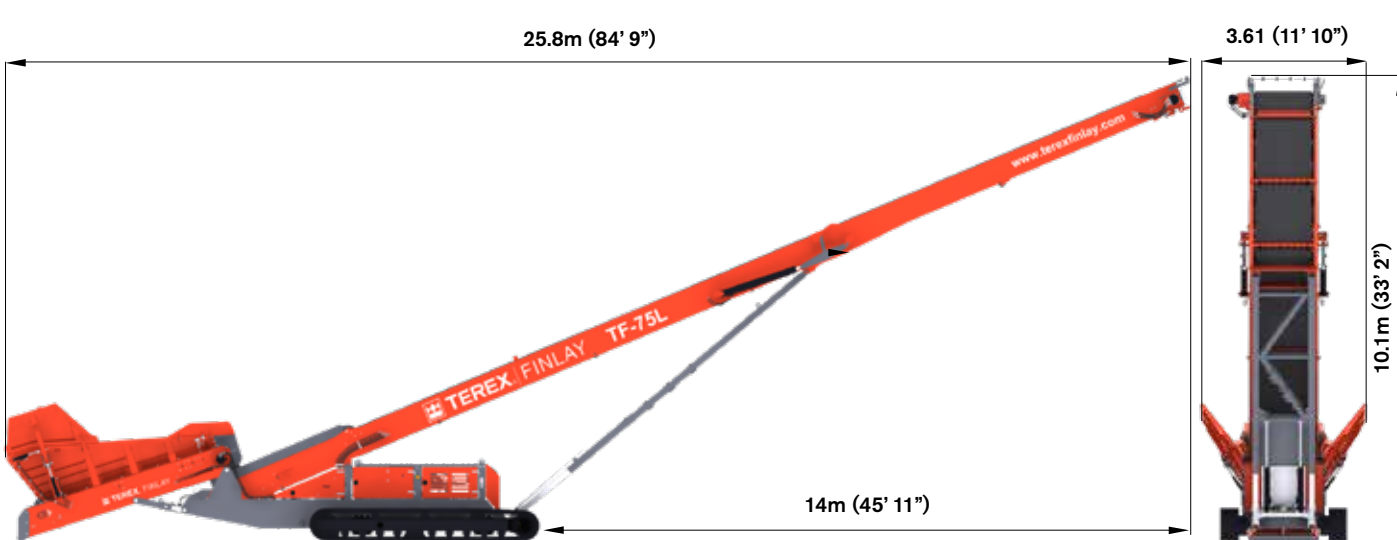

For further information on specific machine weight configurations please consult Terex Finlay

MACHINE WEIGHT: 24,700kg (54,454lbs)

FEED CONVEYOR

- ▶ Capacity: 7m³
- ▶ Feed height: 1.9m (6' 3")
- ▶ Feed in width (flares up): 3.49m (11' 5")

DISCHARGE CONVEYOR:

- ▶ Conveyor length: 22.5m (73' 10")
- ▶ Belt width: 1.2m (48")
- ▶ Optimum working angle: 18°
- ▶ Optimum discharge height: 8.0m (26' 3")
- ▶ Max stockpile capacity at optimum working angle based on 37° angle of repose: 944m³
- ▶ Max. working angle: 24°
- ▶ Max. discharge height: 9.8m (32' 2")
- ▶ Max. stockpile capacity based on 37° angle of repose: 1753m³
- ▶ Capacity: up to 600 tph
- Based on 100mm Lump size at 18° work angle
- Max belt speed

POWERUNIT:

- ▶ Tier 3:
Stage 3A CAT 4.4
- 4 cylinder diesel engine developing 83kW (111hp) @ 1800rpm
- ▶ Tier 4:
Tier 4F / Stage IV - Caterpillar C4.4
- 4 cylinder diesel engine developing 82kW (110 hp) @ 1800rpm

UNDERCARRIAGE:

- ▶ Undercarriage with heavy duty tracks.
4300mm centres, 400mm shoe

