



-  19.4 – 20.5 t
-  95 kW (130 HP)
EU Stage V
-  10.1 m

**ROBUST.
PRECISE.
EFFICIENT.**



MATERIAL HANDLING MACHINE 180MH

WWW.ATLASGMBH.COM

ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.



**Atlas will make you strong
with excellent products and
a comprehensive service.**



With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

180MH*blue*





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

TECHNICAL SPECIFICATION 180MH

ENGINE

Power rating.....95 kW (130 HP)	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800/min	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model..... Deutz TCD 4.1 L4 EU Stage V	Air filter..... Dry air filter	• Cold start assistance
Design..... Turbocharger / intercooler	Battery 2 x 12 V / 100 Ah	• Diesel pre-filter
Cylinder capacity 4038 cm ³	Generator 24 V / 100 A	• Engine monitoring
Number of cylinders 4	Starter..... 24 V / 4 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Load-retaining and fine lowering valves in lifting circuit	• Operating modes: F1 (Fine)
• Load limit controlled high-performance pump	• Pipe break protection valves for lifting and articulated cylinders	F2 (Eco)
• Fuel-efficient flow-on-demand control	• Proportional grab and grab rotating function	F3 (Power)
• Sensitive, proportional, independent control	• 3 circuits for additional consumer loads possible	• Accumulator for emergency lowering of the arm system
• Primary and secondary protection against overload	• Max. oil flow 240 l/min	• Load-limit control
• Suction valves for all work functions	• Max. operating pressure 350 bar	• Cylinder end position damping

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque 49 kNm
• Planetary transmission	• Two, two-stage valves	• Max. swing speed. 8/min

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force 92.7 kN
• Power-shift transmission	• Max. speed 20 km/h	• Gradeability 60 %
• Double-acting brake valve	• Off-road speed 5 km/h	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed 1 km/h	• Parking brake Multi-disc

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 10.00-20 16PR EM23
• Additional axis locking via left joystick	• Toolbox in undercarriage	

TIRES

OPTIONAL:

• 4-road tyres 600/40 – 22.5 14PR Mitas	• 8-road tyres 10.00-20 16PR Nokia	• 8-road tyres 315/70 R22.5 Marked with a band, Grader type
• 4-road tyres 600/40 – 22.5 18PR Alliance	• 8-road tyres 10.00-20 16PR profile for asphalt use	• 8-road tyres 215/70 R22.5 Caliber Power Grip 23
• 4-road tyres 710/40 – 22.5 24PR Nokia	• 8-road tyres 10.00-20 Super elastic (up to 16 km/h)	

WORKING EQUIPMENT 180MH

DRIVER'S CAB

• Meets latest safety standards (ROPS)	DRIVER'S SEAT:	MONITORING:
• Extra large entry zone	• Comfort seat with headrest	• Operating data display screen
• Spacious leg room	• Arm rests and lumbar support	• Automatic system for monitoring, warning and storage of data
• Radio preparation with mute function	• Seat adjustable separately from console	• Rear view security camera
• Ready for electric cooling box	• Air suspension	• Right side camera
• Different options for storage, compartment for documents	• Heated	
• Heat-absorbing glass, tinted windows	• Horizontal and vertical suspension	CLIMATE CONTROL:
• Excellent all-way visibility	• Lumbar support	• Automatic climate control
• Bottle holder		• Excellent air distribution through optimally arranged nozzles
	CONTROL:	• Refrigerant R134a
	• Ergonomic joysticks with proportional slide control	
	• Slim steering column, height and tilt adjustable	SOUND LEVELS:
	• Indicators, controls and operating switches are clearly arranged	• ISO 6396 (L _p A) in driver's cab 72 dB(A)
	• Swing axle lock in the left joystick	• 2000/14 EG (L _w A) ambience level 97 dB(A)

ADDITIONAL EQUIPMENT

• Refueling pump	• Alarm-signal while driving	• Premium Driver seat (Actimo Evolution)
• Beacon light	• Engine speed adjustment via potentiometer	• Electric cooling box
• Gear protection	• Auxiliary heating with water circuit	• Radio with USB
• Cabin Sliding door	• Automatic working brake	• GPS/GSM telemetric system for monitoring of operating data, consumption, position
• Cab protection guard	• Switch hydraulic attachment kit, supports separately at front and rear	• Biodegradable oil
• Cab elevation	• Hydraulic add-on kit, switch supports axially separately	• Wide axles (overall width 2750 mm)
• Joystick steering	• Proportional control of supports by slide in joystick	• Support shield
• 270° camera system	• Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment	Other additional equipment: See price list
• LED working lights		Special options: upon request

FILL CAPACITIES

• Fuel tank301 litres	• Engine oil.....10 litres	• Hydraulic system.....350 litres
• Cooling system.....38 litres	• Hydraulic tank180 litres	• Ad Blue®32 litres

OPERATING WEIGHTS

	MONOBLOCK BOOM 6.00 m (C6.6i)		ADJUSTABLE BOOM Base arm 1.87 m (C6.41) Boom 3.10 m (C6.46)
	Stick 4.00 m (D6.14i)	Stick 4.00 m (D6.14iS)	Stick 2.65 m (D6.3)
Support dozer blade			
SDB / outriggers	18.8 t	19 t	19 t
4 support outriggers	19 t	19.2 t	19.2 t


Operating weight incl. driver, fuel, lubricants and coolant plus 1.0 ton for attachments

ATTACHMENTS (SELECTION)

	Bucket F415	Bucket F418	Trench digger G644
Capacity SAE	0.67 m ³	0.92 m ³	0.56 m ³
Cutting width	850 mm	1100 mm	2000 mm

WORKING RANGES 180MH


Loading boom 6.0 m (C6.6i) + Stick 4.0 m (D6.14i)

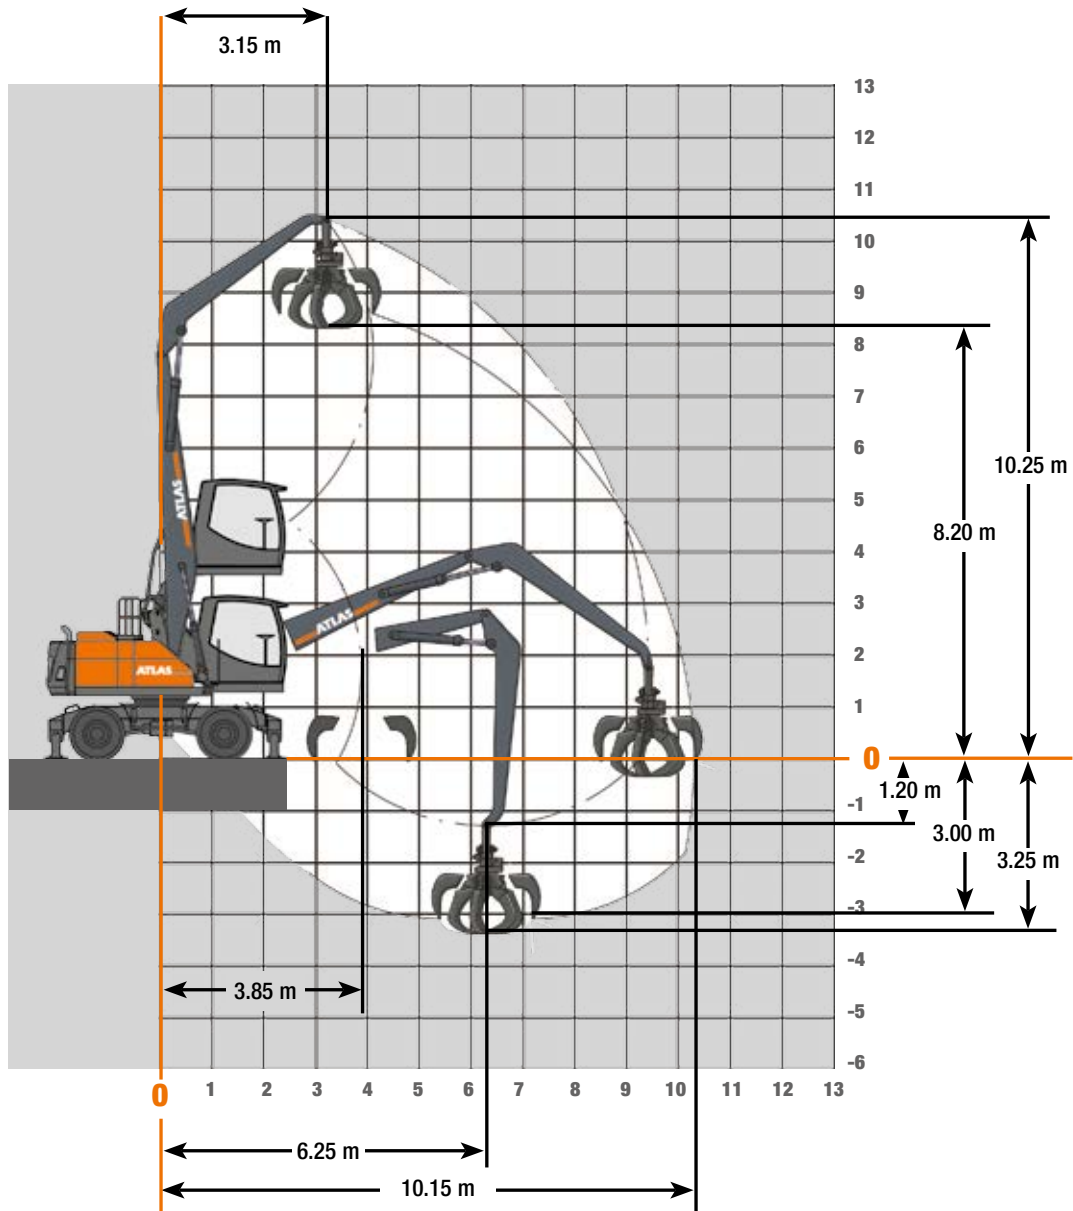


Attachments



Load hook



Log grab



Clamshell grab



Orange peel grab



Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 180MH

Lifting capacities: Loading boom 6.0 m (C6.6i) with Stick 4.0 m (D6.14i). Max. reach 10.15 m


HEIGHT	Undercarriage position		3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m	8.5 m	9.0 m
+8.0 m	FRONT 	outriggers down			7353	6324	5827	5407	5044	4723					
		outriggers up			7353	6324	5827	5129*	4469*	3933*					
	LATERAL 	outriggers down			7353	6324	5827	5407	5044	4723					
		outriggers up			6092*	5251*	4460*	3843*	3347*	2939*					
+7.0 m	FRONT 	outriggers down			7295	6360	5852	5421	5048	4717	4419	4141			
		outriggers up			7295	6360	5852	5123*	4470*	3941*	3503*	3134*			
	LATERAL 	outriggers down			7295	6360	5852	5421	5048	4717	4419	4141			
		outriggers up			6090*	5236*	4449*	3837*	3348*	2947*	2612*	2327*			
+ 6.0 m	FRONT 	outriggers down			7173	6512	5966	5504	5105	4753	4438	4148	3874		
		outriggers up			7173	6512	5881*	5067*	4427*	3910*	3483*	3124*	2818*		
	LATERAL 	outriggers down			7173	6512	5966	5504	5105	4753	4438	4148	3874		
		outriggers up			6128*	5154*	4382*	3784*	3307*	2917*	2593*	2318*	2081*		
+ 5.0 m	FRONT 	outriggers down	7539	8413	7516	6764	6150	5636	5196	4812	4471	4161	3871	3591	
		outriggers up	7539	8413	7516	6764	5750*	4964*	4345*	3846*	3434*	3088*	2793*	2538*	
	LATERAL 	outriggers down	7539	8413	7516	6764	6150	5636	5196	4812	4471	4161	3871	3591	
		outriggers up	7539	7365*	5991*	5001*	4261*	3687*	3230*	2857*	2546*	2283*	2057*	1860*	
+ 4.0 m	FRONT 	outriggers down	9899	9084	7946	7065	6359	5778	5288	4866	4494	4160	3851	3558	3264
		outriggers up	9899	9084	7871*	6540*	5565*	4820*	4232*	3757*	3364*	3034*	2752*	2510*	2299*
	LATERAL 	outriggers down	9899	9084	7946	7065	6359	5778	5288	4866	4494	4160	3851	3558	3264
		outriggers up	8898*	6977*	5694*	4776*	4088*	3552*	3123*	2772*	2479*	2231*	2018*	1833*	1672*
+ 3.0 m	FRONT 	outriggers down	11450	9620	8299	7297	6508	5867	5332	4875	4476	4118	3792	3482	3173
		outriggers up	11450	9196*	7459*	6243*	5343*	4650*	4100*	3653*	3282*	2969*	2704*	2474*	2274*
	LATERAL 	outriggers down	11450	9620	8299	7297	6508	5867	5332	4875	4476	4118	3792	3482	3173
		outriggers up	8079*	6442*	5320*	4503*	3882*	3393*	2999*	2674*	2401*	2169*	1971*	1799*	1648*
+2.0 m	FRONT 	outriggers down	1339	5367	8292	7283	6477	5816	5264	4792	4378	4007	3665	3338	3011
		outriggers up	1339	5367	7053*	5947*	5121*	4479*	3967*	3549*	3201*	2907*	2655*	2437*	2246*
	LATERAL 	outriggers down	1339	5367	8292	7283	6477	5816	5264	4792	4378	4007	3665	3338	3011
		outriggers up	1339	5367	4952*	4231*	3675*	3233*	2873*	2575*	2324*	2110*	1925*	1763*	1621*
+1.0 m	FRONT 	outriggers down		3077	6471	6884	6167	5555	5027	4567	4157	3783	3433	3094	2746
		outriggers up		3077	6471	5731*	4951*	4345*	3860*	3463*	3132*	2852*	2612*	2403*	2222*
	LATERAL 	outriggers down		3077	6471	6884	6167	5555	5027	4567	4157	3783	3433	3094	2746
		outriggers up		3077	4703*	4032*	3517*	3107*	2772*	2494*	2258*	2057*	1883*	1731*	1597*
0.0 m	FRONT 	outriggers down		3313	5512	6043	5511	5015	4561	4147	3765	3405	3058	2710	2339
		outriggers up		3313	5512	5603*	4840*	4252*	3782*	3399*	3080*	2810*	2579*	2379*	2205*
	LATERAL 	outriggers down		3313	5512	6043	5511	5015	4561	4147	3765	3405	3058	2710	2339
		outriggers up		3313	4573*	3914*	3414*	3019*	2699*	2433*	2208*	2017*	1851*	1707*	1581*

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

WORKING RANGES 180MH


Loading boom 6.0 m (C6.6i) + Stick 4.0 m (D6.14iS)

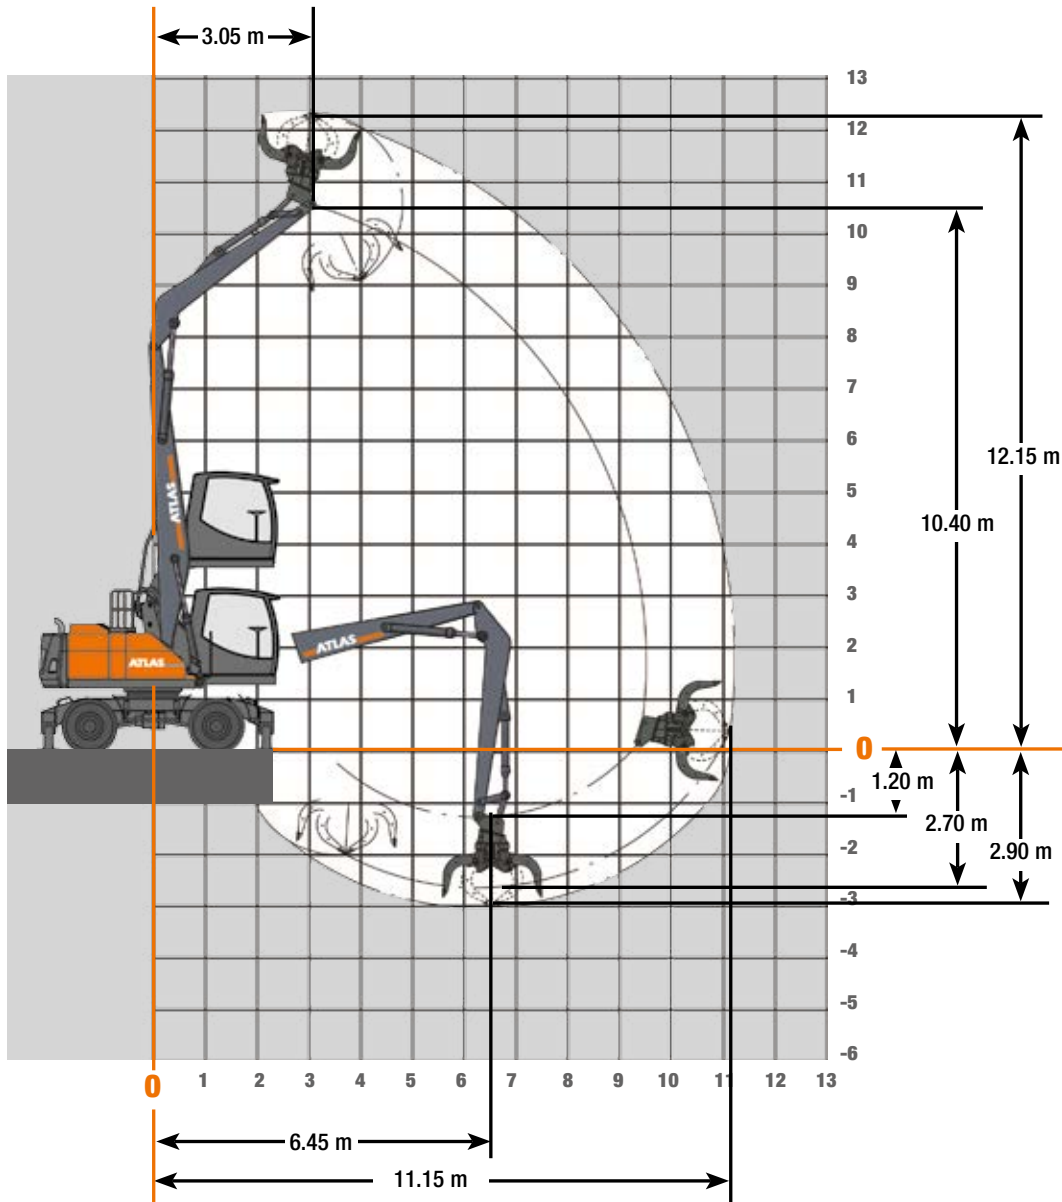

Attachments



Load hook



Log grab



Clamshell grab



Orange peel grab



Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 180MH

Lifting capacities: Loading boom 6.0 m (C6.6i) with Stick 4.0 m (D6.14iS) Max. reach 11.05 m


HEIGHT	Undercarriage position		3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m	8.5 m	9.0 m
+8.0 m	FRONT 	outriggers down			7353	6324	5827	5407	5044	4723					
		outriggers up			7353	6324	5827	5130*	4469*	3933*					
	LATERAL 	outriggers down			7353	6324	5827	5407	5044	4723					
		outriggers up			6092*	5251*	4460*	3843*	3347*	2939*					
+7.0 m	FRONT 	outriggers down			7295	6359	5851	5420	5047	4717	4418	4141			
		outriggers up			7295	6359	5851	5123*	4469*	3941*	3503*	3134*			
	LATERAL 	outriggers down			7295	6359	5851	5420	5047	4717	4418	4141			
		outriggers up			6091*	5235*	4448*	3836*	3347*	2947*	2612*	2327*			
+ 6.0 m	FRONT 	outriggers down			7171	6510	5965	5503	5104	4753	4437	4147	3873		
		outriggers up			7171	6510	5880*	5066*	4426*	3909*	3482*	3124*	2817*		
	LATERAL 	outriggers down			7171	6510	5965	5503	5104	4753	4437	4147	3873		
		outriggers up			6130*	5153*	4381*	3783*	3306*	2917*	2592*	2317*	2080*		
+ 5.0 m	FRONT 	outriggers down	8175	8460	7513	6762	6148	5634	5194	4811	4470	4160	3871	3591	
		outriggers up	8175	8460	7513	67 62	5749*	4962*	4344*	3845*	3433*	3087*	2793*	2537*	
	LATERAL 	outriggers down	8175	8460	7513	6762	6148	5634	5194	4811	4470	4160	3871	3591	
		outriggers up	8175	7368*	5988*	4999*	4259*	3686*	3229*	2856*	2545*	2282*	2057*	1860*	
+ 4.0 m	FRONT 	outriggers down	10614	9080	7943	7062	6357	5776	5287	4865	4493	4159	3850	3557	3263
		outriggers up	10614	9080	7867*	6537*	5562*	4818*	4231*	3756*	3363*	3033*	2751*	2509*	2299*
	LATERAL 	outriggers down	10614	9080	7943	7062	6357	5776	5287	4865	4493	4159	3850	3557	3263
		outriggers up	8893*	6973*	5691*	4774*	4086*	3550*	3122*	2771*	2478*	2230*	2017*	1832*	1672*
+ 3.0 m	FRONT 	outriggers down	11445	9616	8295	7294	6505	5865	5330	4873	4474	4117	3791	3481	3172
		outriggers up	11445	9191*	7455*	6239*	5340*	4648*	4098*	3651*	3280*	2968*	2703*	2474*	2273*
	LATERAL 	outriggers down	11445	9616	8295	7294	6505	5865	5330	4873	4474	4117	3791	3481	3172
		outriggers up	8074*	6438*	5316*	4500*	3879*	3391*	2997*	2672*	2399*	2168*	1970*	1798*	1647*
+2.0 m	FRONT 	outriggers down		6426	8289	7280	6474	5814	5262	4790	4377	4006	3664	3337	3010
		outriggers up		6426	7049*	5944*	5118*	4477*	3965*	3547*	3200*	2906*	2654*	2436*	2245*
	LATERAL 	outriggers down		6426	8289	7280	6474	5814	5262	4790	4377	4006	3664	3337	3010
		outriggers up		5919*	4948*	4228*	3672*	3230*	2871*	2573*	2323*	2108*	1923*	1762*	1620*
+1.0 m	FRONT 	outriggers down		3662	7213	6881	6164	5552	5025	4565	4155	3781	3432	3093	2745
		outriggers up		3662	6775*	5728*	4948*	4342*	3858*	3461*	3131*	2851*	2610*	2402*	2221*
	LATERAL 	outriggers down		3662	7213	6881	6164	5552	5025	4565	4155	3781	3432	3093	2745
		outriggers up		3662	4699*	4029*	3514*	3104*	2770*	2492*	2257*	2056*	1881*	1730*	1596*
0.0 m	FRONT 	outriggers down		3758	6011	6040	5508	5012	4559	4145	3763	3404	3057	2709	2338
		outriggers up		3758	6011	5600*	4838*	4249*	3780*	3397*	3078*	2808*	2577*	2377*	2204*
	LATERAL 	outriggers down		3758	6011	6040	5508	5012	4559	4145	3763	3404	3057	2709	2338
		outriggers up		3758	4570*	3912*	3411*	3017*	2696*	2431*	2207*	2015*	1850*	1706*	1580*

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

WORKING RANGES 180MH


Adjustable Boom, Base Arm 1.87 m (C6.41) and Boom 3.62 m (C6.461) + Stick 2.65 m (D6.3)

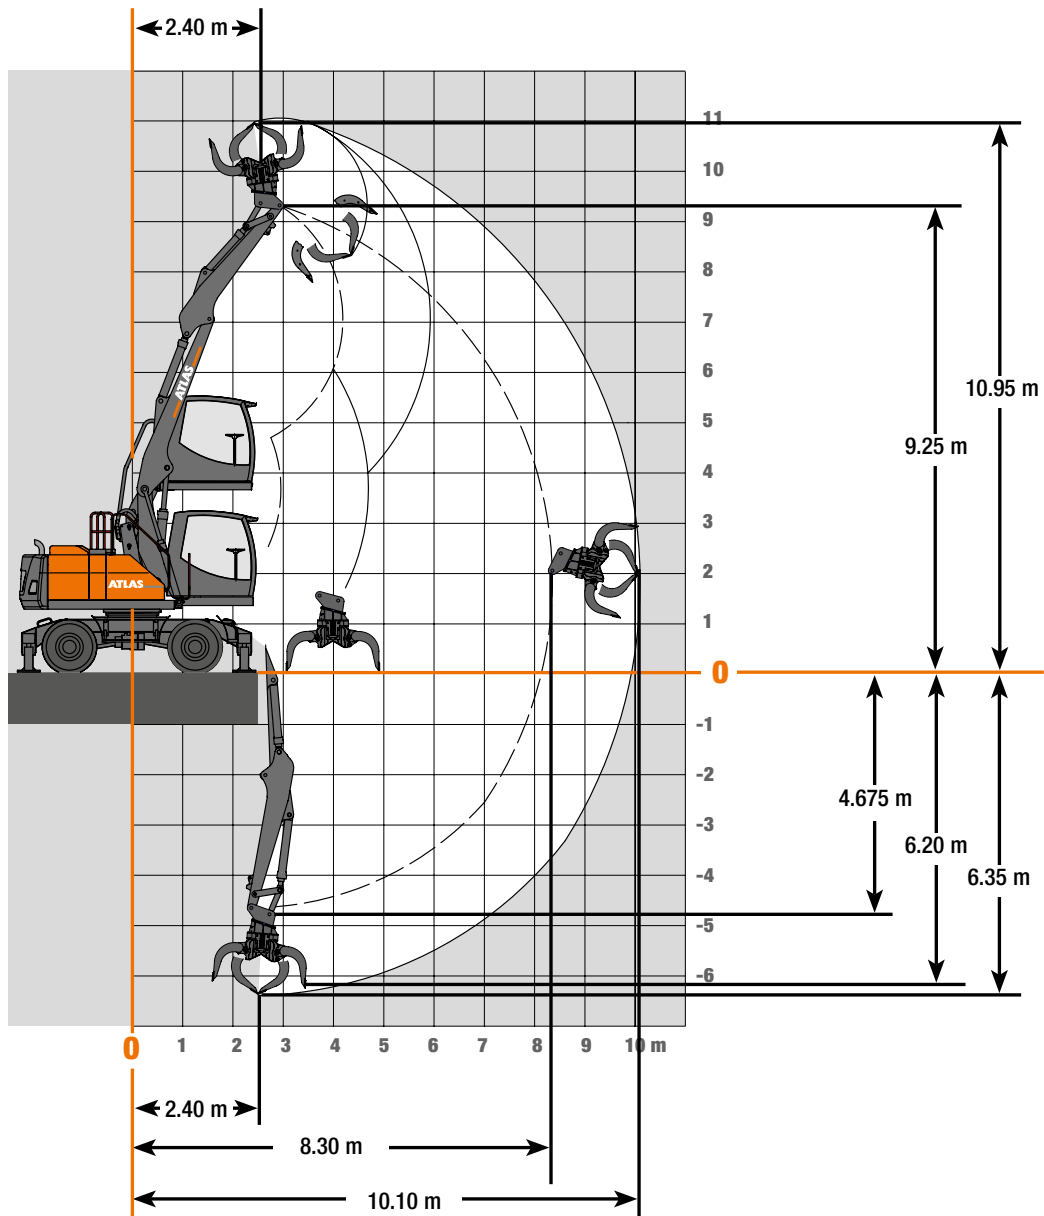


Attachments



Load hook



Log grab




Clamshell grab



Orange peel grab



Load lifting magnet



Sorting grapple

LIFTING CAPACITIES 180MH

Lifting capacities: Base Arm 1.87 m (C6.41) and Boom 3.62 m (C6.461) + Stick 2.65 m (D6.3), Max. Reach 9.73 m


HEIGHT	Undercarriage position		3,0 m	3,5 m	4,0 m	4,5 m	5,0 m	5,5 m	6,0 m	6,5 m	7,0 m	7,5 m	8,0 m
+7.0 m	FRONT 	outriggers down				4715	4699	4509	3810				
		outriggers up				4715	4699	4509	3810				
	LATERAL 	outriggers down				4715	4699	4509	3810				
		outriggers up				4715	4252*	3644*	3109*				
+ 6.0 m	FRONT 	outriggers down			4434	4691	4782	4781	4596	4210			
		outriggers up			4434	4691	4782	4781	4248*	3721*			
	LATERAL 	outriggers down			4434	4691	4782	4781	4596	4210			
		outriggers up			4434	4691	4247*	3698*	3224*	2779*			
+ 5.0 m	FRONT 	outriggers down		4608	4949	5131	5162	4963	4674	4398	4197	2659	
		outriggers up		4608	4949	5131	5162	4772*	4223	3772*	3310*	2659	
	LATERAL 	outriggers down		4608	4949	5131	5162	4963	4674	4398	4197	2659	
		outriggers up		4608	4949	4860*	4195*	3668*	3245*	2839*	2461*	2131*	
+ 4.0 m	FRONT 	outriggers down	8244	7784	6854	6159	5618	5184	4827	4499	4248	4015	
		outriggers up	8244	7784	6854	6159	5363*	4704	4179*	3749*	3330*	2934*	
	LATERAL 	outriggers down	8244	7784	6854	6159	5618	5184	4827	4499	4248	4015	
		outriggers up	8244	6740*	5596*	4757*	4119*	3620*	3220*	2856*	2483*	2163*	
+ 3.0 m	FRONT 	outriggers down	8155	8092	7515	6628	5957	5428	4996	4622	4322	4056	3274
		outriggers up	8155	8092	7151	6079*	5267*	4638	4133	3724*	3318*	2931*	2598*
	LATERAL 	outriggers down	8155	8092	7515	6628	5957	5428	4996	4622	4322	4056	3274
		outriggers up	8071*	6528*	5454*	4657*	4047*	3571*	3191*	2843*	2473*	2159*	1891*
+2.0 m	FRONT 	outriggers down	8839	8602	7963	6973	6215	5618	5132	4727	4373	4062	3752
		outriggers up	8839	8473*	7021*	5979*	5195*	4586*	4102	3716*	3279*	2901*	2581*
	LATERAL 	outriggers down	8839	8602	7963	6973	6215	5618	5132	4727	4373	4062	3752
		outriggers up	7900*	6398*	5353*	4584*	3998*	3539*	3181*	2798*	2433*	2128*	1875*
+1.0 m	FRONT 	outriggers down	9371	8837	8009	7047	6287	5671	5160	4730	4365	4057	3639
		outriggers up	9371	8430	6977*	5941*	5171*	4574*	4110	3657*	3218*	2853*	2554*
	LATERAL 	outriggers down	9371	8837	8009	7047	6287	5671	5160	4730	4365	4057	3639
		outriggers up	7861*	6346*	5316	4565*	3987*	3498*	3092*	2717*	2368*	2081*	1848*
0.0 m	FRONT 	outriggers down	10323	9260	8016	7039	6274	5658	5152	4731	4384	4018	
		outriggers up	10323	8472	7003*	5966*	5198*	4601*	4069*	3559*	3141*	2799*	
	LATERAL 	outriggers down	10323	9260	8016	7039	6274	5658	5152	4731	4384	4018	
		outriggers up	7723*	6212*	5180*	4424*	3843*	3380*	2999*	2615*	2292*	2029*	
-1.0 m	FRONT 	outriggers down	11166	9393	8080	7089	6316	5699	5200	4809	4324	3506	
		outriggers up	10841*	8586*	7066*	5960*	5140*	4504*	3934*	3455*	3071*	2764*	
	LATERAL 	outriggers down	11166	9393	8080	7089	6316	5699	5200	4809	4324	3506	
		outriggers up	7493*	6014*	5012*	4285*	3730*	3289*	2872*	2513*	2225*	1996*	

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

All loading capacities are listed with 2.5 m undercarriage width. The undercarriage may be delivered with 2.75 m width as an option.

DIMENSIONS 180MH

180MH Transport position

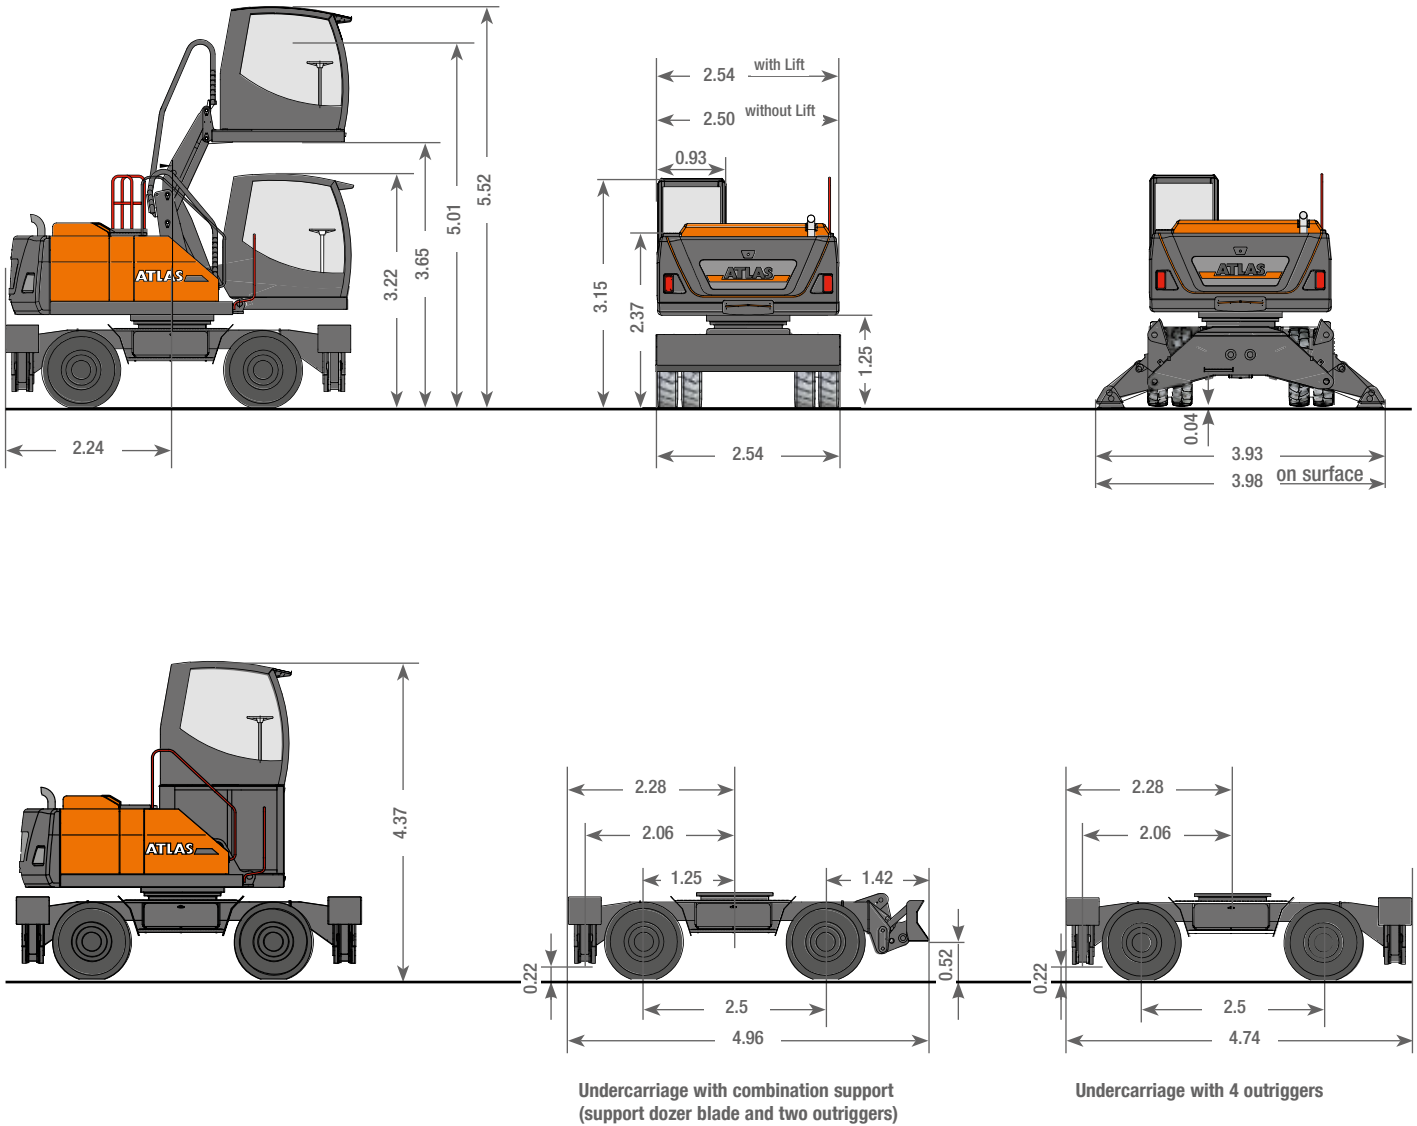



180MH-EN(1) Effective date: 05/2017. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Ref. no. 6192138

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom

T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



ATLAS
SINCE 1919

