



ATLAS

SEIT 1919

-  15.6 - 17.3 t
-  95 kW (130 HP)
EU Stage V
-  0.7 - 1.1 m³

**STABLE.
STRONG.
STEADY.**



WHEELED EXCAVATOR 150W

WWW.ATLASGMBH.COM

ATLAS – CONSTRUCTION MACHINERY MANUFACTURER WITH TRADITION

From person to person

When Hinrich Weyhausen started selling construction and agricultural machinery in 1919, he discovered that the machines which his customers actually needed were not available. So he listened to them carefully and went about building the machines himself – exactly according to the requirements of the people who used his machines every day. He carried out pioneering work with a passion under the brand name of Atlas. His focus was always on the benefit of the machines. And nothing has changed for us in terms of this ideal today.



**Atlas will make you strong
with excellent products and
a comprehensive service.**



With highly motivated employees, a great deal of commitment and expertise ATLAS GmbH develops successful crane & excavator technologies. Numerous customers, engineers and experts all around the globe have made their contribution. The result is robust equipment to enable you to work more effectively and safely than ever before.

As our know-how grew, so too did our dealer and service network worldwide.

We can hence guarantee – in those days and today too – that we will always be on the spot when you need us.



Atlas manufactures a wide range of equipment for the construction, railroad, material handling and infrastructure industries. You will find more information on Atlas under www.atlasgmbh.com.

CONSTRUCTION



TRANSPORT



INFRASTRUCTURE



RECYCLING



CUSTOMER SATISFACTION IS OUR PRIORITY!

WE ARE COMMITTED

to providing our customers with highest quality products and services.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of service performance, reliability, relevance and timeliness.

OUR COMPANY'S MISSION, GOALS AND OBJECTIVES

are directed towards ongoing process improvement as a basis for strengthening our competitive position and for improving product quality and service standards.

QUALITY STANDARDS AND CUSTOMER SATISFACTION

are measured in terms of product performance and reliability.

PRODUCT RANGE

150W





**EXTENSIVE DEALER NETWORK
EXCELLENT SERVICE
CUSTOMER FOCUSED**

TECHNICAL INFORMATION 150W

ENGINE

Power rating.....95 kW (130 HP)	Bore / cylinder stroke 101 / 126	STANDARD BASIC EQUIPMENT:
RPM 1800/min	Cooling system Water-cooled	• Automatic idling system / Engine stop
Model..... Deutz TCD 4.1 L4 EU Stage V	Air filter..... Dry air filter	• Cold start assistance
Design..... Turbocharger	Battery 2 x 12 V / 100 Ah	• Diesel pre-filter
Cylinder capacity 4038 cm ³	Generator 24 V / 100 A	• Engine monitoring
Number of cylinders 4	Starter..... 24 V / 4 kW	

HYDRAULIC SYSTEM

• AWE 5 system (Load sensing)	• Load-retaining and fine lowering valves in lifting circuit	• Operating modes: F1 (Fine)
• Load limit controlled high-performance pump	• Pipe break protection valves for lifting and articulated cylinders	F2 (Eco)
• Fuel-efficient flow-on-demand control	• Proportional grab and grab rotating function	F3 (Power)
• Sensitive, proportional, independent control	• 3 circuits for additional consumer loads possible	• Accumulator for emergency lowering of the arm system
• Primary and secondary protection against overload	• Max. oil flow 240 l/min	• Load-limit control
• Suction valves for all work functions	• Max. operating pressure 350 bar	• Cylinder end position damping

SWING ASSEMBLY

• Axial piston motor with priority valve	• Automatically controlled multi-disc brake	• Swing torque 41 kNm
• Planetary transmission	• Two, two-stage valves	• Max. swing speed 9/min

TRACTION DRIVE AND BRAKES

• Variable displacement motor	• Automotive traveling and cruise control:	• Tractive force 92.7 kN
• Power-shift transmission	• Max. speed 20 km/h	• Gradeability 60 %
• Double-acting brake valve	• Off-road speed 5 km/h	• Dual-circuit brake system Multi-disc
• Travel direction pre-selection via switch in joystick	• Crawling speed 1 km/h	• Parking brake Multi-disc

UNDERCARRIAGE

• Steering axle with automatic oscillating axle locking	• Heavy duty axles	• STD tires: Mitas 10.00-20 16PR EM23
• Additional axis locking via left joystick	• Toolbox in undercarriage	

TIRES

OPTIONAL:

• 4-road tyres 600/40 – 22.5 14PR Mitas	• 8-road tyres 10.00-20 16PR Nokia	• 8-road tyres 315/70 R22.5 Marked with a band, Grader type
• 4-road tyres 600/40 – 22.5 18PR Alliance	• 8-road tyres 10.00-20 16PR profile for asphalt use	• 8-road tyres 215/70 R22.5 Caliber Power Grip 23
• 4-road tyres 710/40 – 22.5 24PR Nokia	• 8-road tyres 10.00-20 Super elastic (up to 16 km/h)	

WORKING EQUIPMENT 150W

DRIVER'S CAB

• Meets latest safety standards (ROPS)	DRIVER'S SEAT:	MONITORING:
• Extra large entry zone	• Comfort seat with headrest	• Operating data display screen
• Spacious leg room	• Arm rests and lumbar support	• Automatic system for monitoring, warning and storage of data
• Radio preparation with mute function	• Seat adjustable separately from console	• Rear view security camera
• Ready for electric cooling box	• Air suspension	• Right side camera
• Different options for storage, compartment for documents	• Heated	
• Heat-absorbing glass, tinted windows	• Horizontal and vertical suspension	CLIMATE CONTROL:
• Excellent all-way visibility	• Lumbar support	• Automatic climate control
• Bottle holder		• Excellent air distribution through optimally arranged nozzles
	CONTROL:	• Refrigerant R134a
	• Ergonomic joysticks with proportional slide control	
	• Slim steering column, height and tilt adjustable	SOUND LEVELS:
	• Indicators, controls and operating switches are clearly arranged	• ISO 6396 (L _p A) in driver's cab 72 dB(A)
	• Swing axle lock in the left joystick	• 2000/14 EG (L _w A) ambience level 97 dB(A)

ADDITIONAL EQUIPMENT

• Refueling pump	• 35% axle differential lock	• Premium Driver seat (Actimo Evolution)
• Beacon light	• Patented trailer hitch	• Electric cooling box
• Gear protection	• Alarm-signal while driving	• Radio with USB
• Cabin Sliding door	• Engine speed adjustment via potentiometer	• GPS/GSM telemetric system for monitoring of operating data, consumption, position
• Cab protection guard	• Auxiliary heating with water circuit	• Biodegradable oil
• Wheel cover	• Automatic working brake	• Wide axles (overall width 2750 mm)
• Cab elevation	• Switch hydraulic attachment kit, supports separately at front and rear	• Wide dozer blade (2750 mm)
• Joystick steering	• Hydraulic add-on kit, switch supports axially separately	• High-speed option 36 km/h
• 270° camera system	• Proportional control of supports by slide in joystick	Other additional equipment: See price list
• LED working lights	• Automatically controlled and monitored electric central lubrication system for uppercarriage and arm equipment	Special options: upon request

FILL CAPACITIES

• Fuel tank 301 litres	• Engine oil 10 litres	• Hydraulic system 220 litres
• Cooling system 35 litres	• Hydraulic tank 180 litres	• Ad Blue® 32 litres

OPERATING WEIGHTS

	MONOBLOCK BOOM 4.32 m (C6.3M)		ADJUSTABLE BOOM Base arm 1.87 m (C6.41) Boom 3.10 m (C6.46)	
	Stick 2.15 m (D6.2)	Stick 2.65 m (D6.3)	Stick 2.15 m (D6.2)	Stick 2.65 m (D6.3)
Support dozer blade	15.3 t	15.4 t	15.6 t	15.7 t
SDB / outriggers	16.3 t	16.4 t	16.7 t	16.8 t
4 support outriggers	16.5 t	16.6 t	16.9 t	17.0 t


Operating weight incl. driver, fuel, lubricants and coolant plus 1.0 ton for attachments

ATTACHMENTS (SELECTION)

	Bucket F415	Bucket F418	Trench digger G644
Capacity SAE	0.67 m ³	0.92 m ³	0.56 m ³
Cutting width	850 mm	1100 mm	2000 mm

WORK AREAS 150W

Monoblock boom 4.32 m (C6.3M)

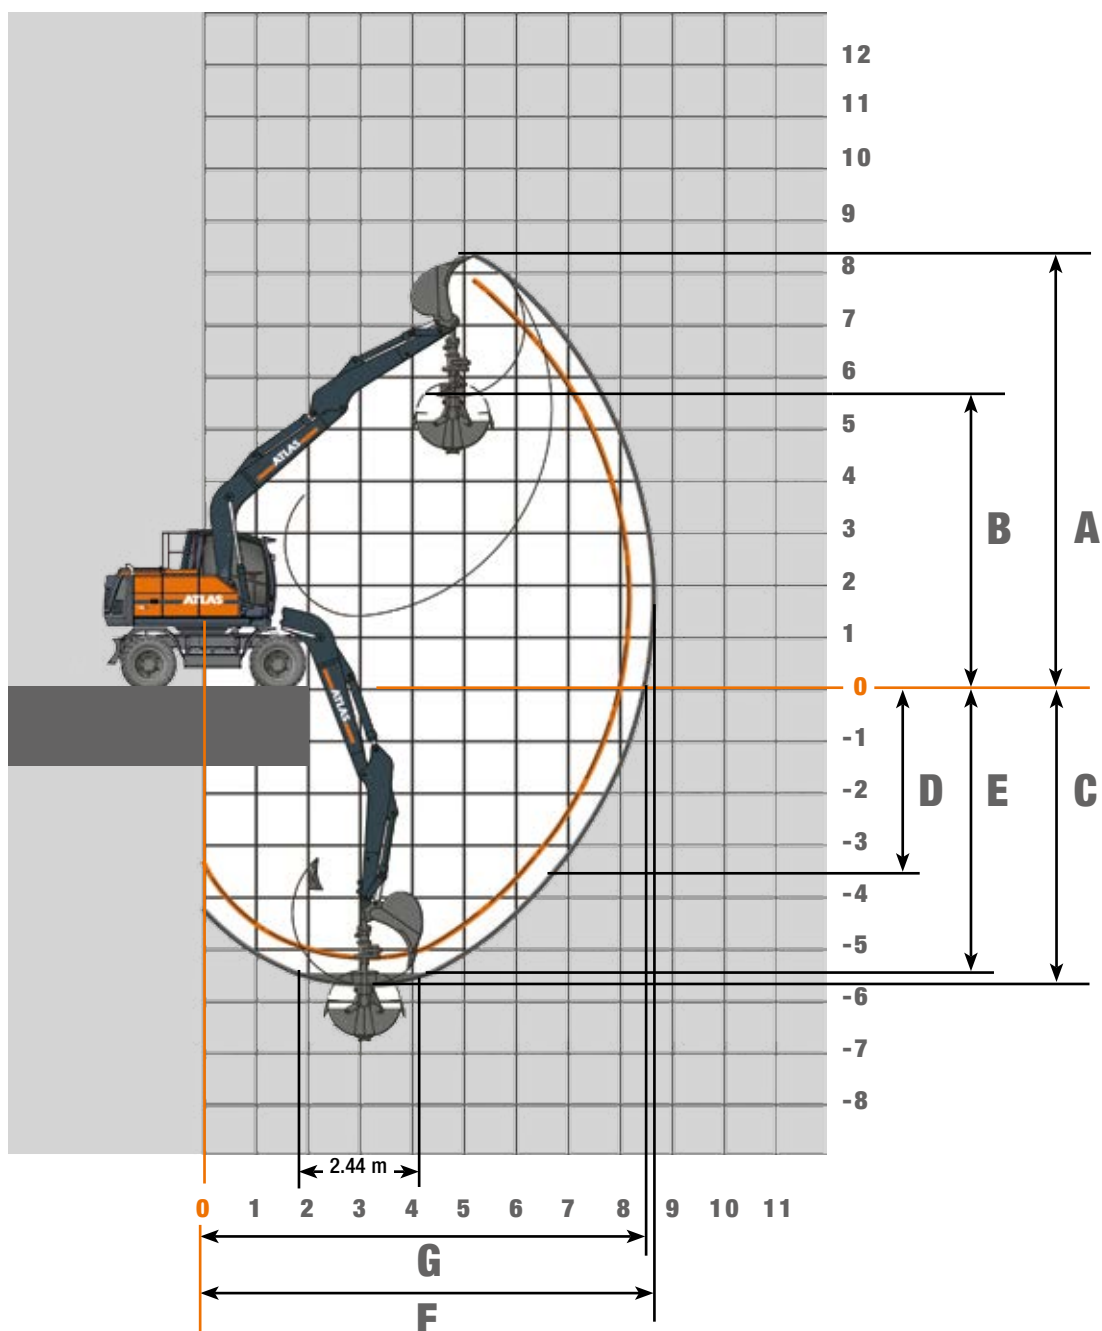

STICK LENGTHS	2.15 m (D6.2)	2.65 m (D6.3)
A Max. cut-in height	8.10 m	8.35 m
B Max. pouring height	5.35 m	5.65 m
C Max. trench depth	5.20 m	5.70 m
D Max. vertical tapping depth	3.00 m	3.55 m
E Max. trench depth with 2.44-metre-wide base	4.95 m	5.50 m
F Max. reach	8.20 m	8.70 m
G Max. reach in the standing plane	8.05 m	8.50 m
Max. bucket digging force	130 kN	130 kN
Max. stick digging force	82 kN	72 kN

Unit is equipped with monoblock boom 4.32 m (C6.3M).

LIFTING CAPACITIES 150W

Lifting Capacities Monoblock boom 4.32 m (C6.3 M) with Stick 2.15 m (D6.2). Max. Reach 8.20 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m
+ 5.0 m	FRONT		SDB rear, supported					4226	4195		
			SDB front, raised					4226	4195		
	LATERAL		SDB supported					4226	4183*		
			SDB raised					4226	3694*		
+ 4.0 m	FRONT		SDB rear, supported				4729	4504	4338	4228	
			SDB front, raised				4729	4504	4338	4228	
	LATERAL		SDB supported				4729	4504	4138*	3635*	
			SDB raised				4729	4193*	3651*	3209*	
+ 3.0 m	FRONT		SDB rear, supported		6809	5963	5382	4964	4652	4418	4251
			SDB front, raised		6809	5963	5382	4964	4652	4418	4251
	LATERAL		SDB supported		6809	5963	5382	4636*	4051*	3579*	3185*
			SDB raised		6711*	5555*	4713*	4072*	3566*	3154*	2808*
+ 2.0 m	FRONT		SDB rear, supported		8168	6915	6067	5460	5008	4660	4386
			SDB front, raised		8168	6915	6067	5460	5008	4660	4386
	LATERAL		SDB supported		7377*	6112*	5194*	4497*	3949*	3507*	3139*
			SDB raised		6338*	5299*	4529*	3937*	3467*	3084*	2763*
+ 1.0 m	FRONT		SDB rear, supported		8919	7551	6570	5844	5289	4849	4480
			SDB front, raised		8919	7551	6570	5844	5289	4849	4473*
	LATERAL		SDB supported		7126*	5913*	5040*	4379*	3860*	3440*	3094*
			SDB raised		6099*	5108*	4381*	3823*	3380*	3019*	2719*
+ 0 m	FRONT		SDB rear, supported		7473	9006	7733	6759	5999	5392	4143
			SDB front, raised		7473	9006	7733	6759	5999	5392	4143
	LATERAL		SDB supported		7473	7026*	5807*	4947*	4302*	3799*	3398*
			SDB raised		7473	6005*	5007*	4291*	3749*	3321*	2701*
- 1.0 m	FRONT		SDB rear, supported	8120	9990	8609	7495	6594	5853	5219	4614
			SDB front, raised	8120	9990	8609	7495	6594	5853	5219	4614
	LATERAL		SDB supported	8120	8936*	7032*	5795*	4928*	4285*	3790*	3404*
			SDB raised	8120	7541*	6010*	4995*	4273*	3732*	3313*	2984*
- 2.0 m	FRONT		SDB rear, supported	10191	8825	7706	6768	5961	5228	4445	
			SDB front, raised	10191	8825	7706	6768	5961	5228	4445	
	LATERAL		SDB supported	10191	8825	7099*	5845*	4968*	4326*	3846*	
			SDB raised	10191	7631*	6074*	5043*	4312*	3772*	3367*	
- 3.0 m	FRONT		SDB rear, supported	7787	6855	6019	5220	4339			
			SDB front, raised	7787	6855	6019	5220	4339			
	LATERAL		SDB supported	7787	6855	6019	5220	4339			
			SDB raised	7787	6855	6019	5165*	4339			


Lifting Capacities Monoblock boom 4.32 m (C6.3M) with Stick 2.65 m (D6.3). Max. Reach 8.70 m

Height	Undercarriage type		2,5 m	3,0 m	3,5 m	4,0 m	4,5 m	5,0 m	5,5 m	6,0 m	6,5 m	7,0 m
+ 5.0 m	FRONT		SDB rear, supported						3748	3762	1902	
			SDB front, raised						3748	3762	1902	
	LATERAL		SDB supported						3748	3713*	1902	
			SDB raised						3748	3283*	1902	
+ 4.0 m	FRONT		SDB rear, supported					4075	3958	3870	3817	
			SDB front, raised					4075	3958	3870	3817	
	LATERAL		SDB supported					4075	3958	3678*	3256*	
			SDB raised					4075	3697*	3249*	2876*	
+ 3.0 m	FRONT		SDB rear, supported			5351	4904	4571	4317	4120	3969	3152
			SDB front, raised			5351	4904	4571	4317	4120	3969	3152
	LATERAL		SDB supported			5351	4904	4571	4087*	3606*	3209*	2872*
			SDB raised			5351	4782*	4119*	3599*	3179*	2830*	2532*
+ 2.0 m	FRONT		SDB rear, supported		7464	6394	5660	5129	4729	4420	4176	3896
			SDB front, raised		7464	6394	5660	5129	4729	4420	4176	3896
	LATERAL		SDB supported		7464	6192*	5245*	4529*	3970*	3519*	3146*	2832*
			SDB raised		6458*	5372*	4576*	3967*	3485*	3094*	2769*	2493*
+ 1.0 m	FRONT		SDB rear, supported		8523	7212	6287	5607	5091	4685	4356	4027
			SDB front, raised		8523	7212	6287	5607	5091	4685	4356	4024*
	LATERAL		SDB supported		7172*	5943*	5057*	4387*	3860*	3436*	3085*	2790*
			SDB raised		6141*	5135*	4396*	3829*	3379*	3013*	2709*	2452*
+ 0 m	FRONT		SDB rear, supported		7828	8936	7618	6638	5891	5305	4831	4427
			SDB front, raised		7828	8936	7618	6638	5891	5305	4831	4418*
	LATERAL		SDB supported		7828	6995*	5789*	4930*	4284*	3779*	3373*	3039*
			SDB raised		7435*	5972*	4987*	4273*	3729*	3300*	2952*	2664*
- 1,0 m	FRONT		SDB rear, supported		10073	8813	7598	6655	5906	5293	4769	4270
			SDB front, raised		10073	8813	7598	6655	5906	5293	4769	4270
	LATERAL		SDB supported		8813*	6946*	5730*	4872*	4234*	3740*	3348*	3034*
			SDB raised		7423*	5927*	4930*	4217*	3681*	3263*	2928*	2659*
- 2.0 m	FRONT		SDB rear, supported	10511	9541	8197	7139	6281	5560	4923	4279	
			SDB front, raised	10511	9541	8197	7139	6281	5560	4923	4279	
	LATERAL		SDB supported	10511	8879*	6983*	5750*	4885*	4246*	3758*	3379*	
			SDB raised	10028*	7485*	5961*	4950*	4230*	3693*	3280*	2958*	
- 3.0 m	FRONT		SDB rear, supported	9333	8003	6953	6076	5298	4539			
			SDB front, raised	9333	8003	6953	6076	5298	4539			
	LATERAL		SDB supported	9333	8003	6953	5839*	4965*	4329*			
			SDB raised	9333	7618*	6064*	5034*	4307*	3773*			

The specified max. loading capacities in kilogrammes (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

WORK AREAS 150W

Adjustable Boom, Base arm 1.87 m (C6.41) and Boom 3.10 m (C6.46)

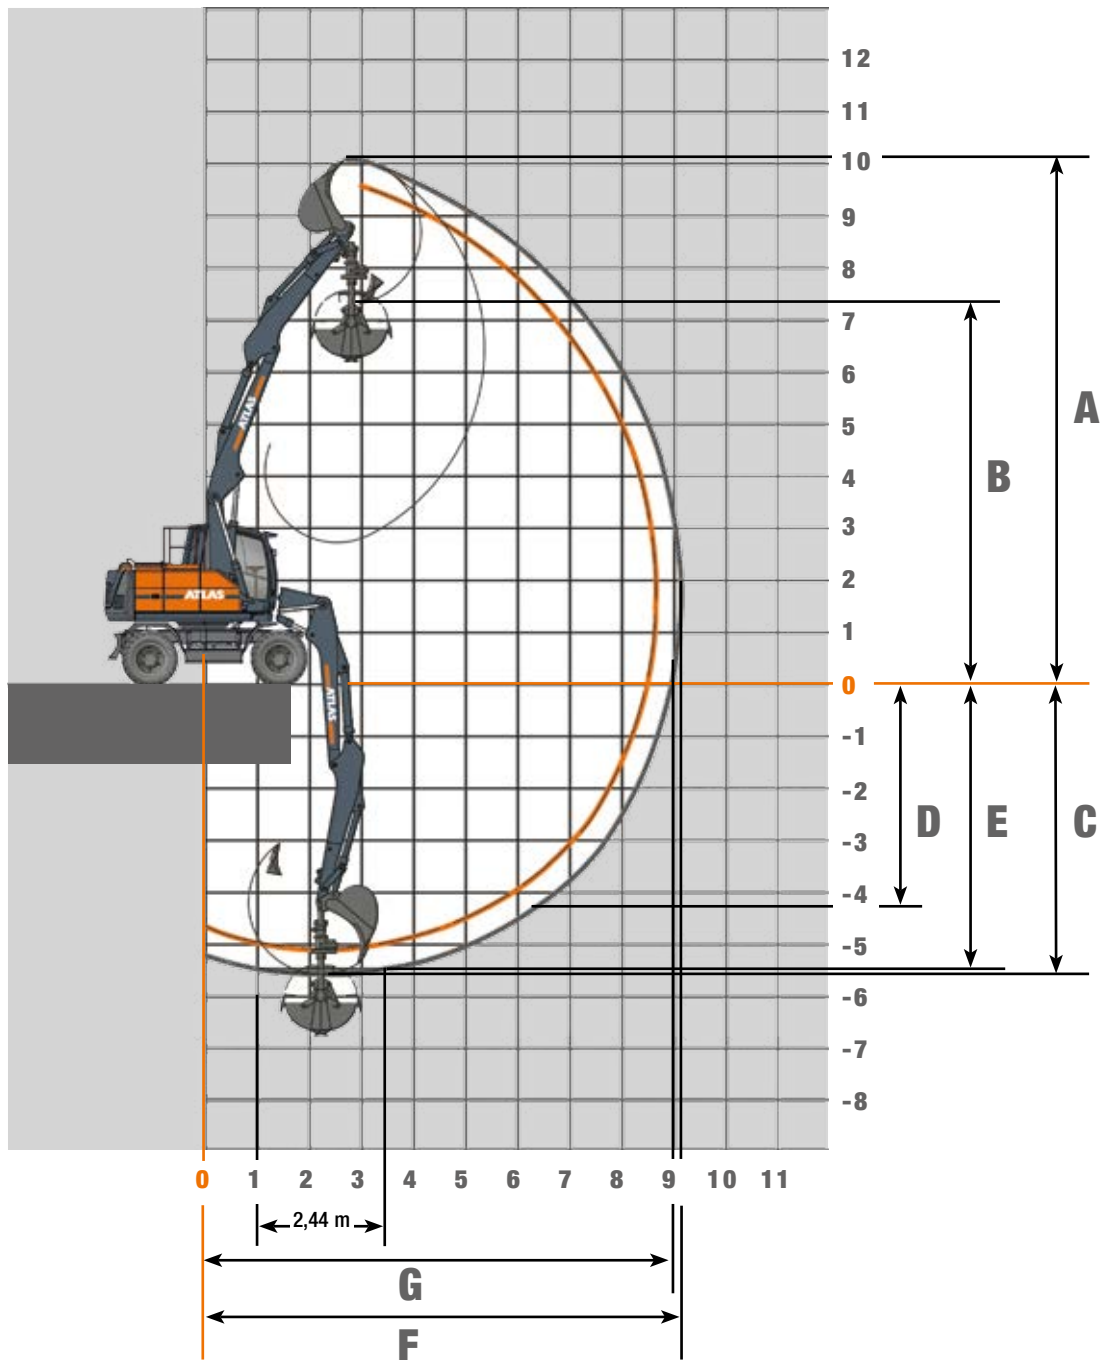

STICK LENGTHS	2.15 m (D6.2)	2.65 m (D6.3)
A Max. cut-in height	9.70 m	10.10 m
B Max. pouring height	6.95 m	7.35 m
C Max. trench depth	5.10 m	5.60 m
D Max. vertical tapping depth	3.80 m	4.30 m
E Max. trench depth with 2.44-metre-wide base	5.00 m	5.50 m
F Max. reach	8.70 m	9.20 m
G Max. reach in the standing plane	8.55 m	9.05 m
Max. bucket digging force	130 kN	130 kN
Max. stick digging force	82 kN	72 kN

Unit is equipped with standard adjustable boom: base arm 1.87 m (C6.41) and boom 3.10 m (C6.46).

LIFTING CAPACITIES 150W

Lifting Capacities Adjustable Boom: Base arm 1.87 m (C6.41) and Boom 3.10 m (C6.46) with Stick 2.15 m (D6.2). Max. Reach 8.70 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m
+ 6.0 m	FRONT		SDB rear, supported		5379	5440	5095	4826	4616	4463		
			SDB front, raised		5379	5440	5095	4826	4616	4463		
	QUER		SDB supported		5379	5440	5095	4826	4616	4156*		
			SDB raised		5379	5440	5095	4826	4264*	3668*		
+ 5.0 m	FRONT		SDB rear, supported	5060	5667	5860	5420	5035	4729	4484	4291	3873
			SDB front, raised	5060	5667	5860	5420	5035	4729	4484	4291	3873
	QUER		SDB supported	5060	5667	5860	5420	5035	4729	4154	3651*	3155*
			SDB raised	5060	5667	5860	5420	4903	4239*	3716	3223*	2776*
+ 4.0 m	FRONT		SDB rear, supported	7451	7746	6843	6047	5467	5024	4675	4395	4166
			SDB front, raised	7451	7746	6843	6047	5467	5024	4675	4395	4166
	QUER		SDB supported	7451	7746	6843	6047	5403*	4675*	4115*	3662*	3196*
			SDB raised	7451	7746	6797*	5649*	4813*	4184*	3687*	3253*	2816*
+ 3.0 m	FRONT		SDB rear, supported	7391	7638	7554	6811	5993	5392	4929	4561	4257
			SDB front, raised	7391	7638	7554	6811	5993	5392	4929	4561	4257
	QUER		SDB supported	7391	7638	7481*	6215*	5302*	4612*	4072*	3643*	3189*
			SDB raised	7391	7638	6612*	5528*	4734	4127*	3656*	3239*	2809*
+ 2.0 m	FRONT		SDB rear, supported	8918	8725	8211	7380	6415	5699	5146	4704	4335
			SDB front, raised	8918	8725	8211	7380	6415	5699	5146	4704	4335
	QUER		SDB supported	8918	8725	7361*	6127*	5238	4571*	4050*	3612*	3147*
			SDB raised	8918	8078*	6520*	5454*	4680*	4100*	3650*	3183*	2768*
+ 1.0 m	FRONT		SDB rear, supported	10340	9574	8637	7499	6554	5818	5228	4745	4343
			SDB front, raised	10340	9574	8637	7499	6554	5818	5228	4745	4343
	QUER		SDB supported	10340	9230*	7360*	6116*	5231*	4578*	4077*	3523*	3080*
			SDB raised	10340	8081*	6513*	5445*	4684*	4114*	3587*	3096*	2703*
+ 0 m	FRONT		SDB rear, supported	12222	10494	8812	7523	6565	5825	5236	4763	4382
			SDB front, raised	12222	10494	8812	7523	6565	5825	5236	4763	4382
	QUER		SDB supported	12222	9321	7431*	6182*	5266*	4550*	3935*	3418*	3008*
			SDB raised	10631*	8053*	6469*	5387*	4594*	3984*	3450*	2995*	2632*
- 1.0 m	FRONT		SDB rear, supported	13514	10753	8912	7607	6640	5901	5349	4766	3982
			SDB front, raised	13514	10753	8912	7607	6640	5901	5349	4766	3982
	QUER		SDB supported	12601*	9286*	7344*	6062*	5147*	4404*	3802*	3332*	2969*
			SDB raised	10427*	7860*	6300*	5245*	4479*	3844*	3320*	2911*	2594*
- 2.0 m	FRONT		SDB rear, supported	13813	11003	9158	7855	6786	5841	4889	3701	
			SDB front, raised	13813	11003	9158	7855	6786	5841	4889	3701	
	QUER		SDB supported	12543*	9216*	7278*	5974*	4997*	4281*	3735*	3313*	
			SDB raised	10374*	7794*	6237*	5160*	4335*	3724*	3255*	2892*	


Lifting Capacities Adjustable Boom: Base arm 1.87 m (C6.41) and Boom 3.10 m (C6.46) with Stick 2.65 m (D6.3). Max. Reach 9.20 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m
+ 6.0 m	FRONT		SDB rear, supported		4334	4515	4407	4239	4103	4001			
			SDB front, raised		4334	4515	4407	4239	4103	4001			
	LATERAL		SDB supported		4334	4515	4407	4239	4103	3690*			
			SDB raised		4334	4515	4407	4239	3754*	3265*			
+ 5.0 m	FRONT		SDB rear, supported	3957	4449	4648	4637	4391	4187	4017	3879	3132	
			SDB front, raised	3957	4449	4648	4637	4391	4187	4017	3879	3132	
	LATERAL		SDB supported	3957	4449	4648	4637	4391	4173*	3691	3266*	2845*	
			SDB raised	3957	4449	4648	4637	4267*	3733*	3304*	2887*	2504*	
+ 4.0 m	FRONT		SDB rear, supported	5224	5553	5732	5558	5083	4710	4411	4164	3959	3786
			SDB front, raised	5224	5553	5732	5558	5083	4710	4411	4164	3959	3786
	LATERAL		SDB supported	5224	5553	5732	5558	5083	4693*	4120*	3659	3282*	2877*
			SDB raised	5224	5553	5732	5558	4838*	4195*	3689*	3282*	2909*	2537*
+ 3.0 m	FRONT		SDB rear, supported	7216	7569	7357	6358	5649	5117	4703	4371	4096	3861
			SDB front, raised	7216	7569	7357	6358	5649	5117	4703	4371	4096	3861
	LATERAL		SDB supported	7216	7569	7357	6230*	5308*	4605	4057*	3620*	3266*	2869*
			SDB raised	7216	7569	6644*	5538*	4729*	4118	3639*	3253*	2895*	2529*
+ 2.0 m	FRONT		SDB rear, supported	9000	8792	8133	7069	6165	5495	4979	4566	4226	3934
			SDB front, raised	9000	8792	8133	7069	6165	5495	4979	4566	4226	3934
	LATERAL		SDB supported	9000	8792	7336*	6105*	5212*	4539*	4017*	3597	3227*	2834*
			SDB raised	9000	8045*	6487	5426*	4655*	4065*	3606*	3243	2850*	2492*
+ 1.0 m	FRONT		SDB rear, supported	9804	9227	8484	7409	6454	5722	5146	4679	4288	3949
			SDB front, raised	9804	9227	8484	7409	6454	5722	5146	4679	4288	3938*
	LATERAL		SDB supported	9804	9124*	7286*	6054*	5174	4515*	4010*	3613*	3153*	2776*
			SDB raised	9804	7991	6437*	5389	4625	4052*	3612*	3190*	2774*	2435*
+ 0 m	FRONT		SDB rear, supported	11381	10082	8684	7421	6479	5747	5162	4685	4292	3973
			SDB front, raised	11381	10082	8684	7421	6479	5747	5162	4685	4292	3935*
	LATERAL		SDB supported	11381	9181	7314*	6079*	5206*	4556	4010*	3494*	3059*	2709*
			SDB raised	10617*	8044*	6479*	5419	4632*	4014*	3521*	3067*	2681*	2369*
- 1.0 m	FRONT		SDB rear, supported	12927	10568	8760	7477	6522	5785	5203	4752	4326	3707
			SDB front, raised	12927	10568	8760	7477	6522	5785	5203	4752	4326	3707
	LATERAL		SDB supported	12485	9307*	7361*	6074*	5155*	4461*	3869*	3371*	2973*	2664*
			SDB raised	10440*	7876*	6314*	5255*	4485*	3897*	3384*	2947*	2597*	2325*
- 2.0 m	FRONT		SDB rear, supported	13520	10753	8917	7619	6670	5959	5285	4569	3652	
			SDB front, raised	13520	10753	8917	7619	6670	5959	5285	4569	3652	
	LATERAL		SDB supported	12473*	9169*	7240*	5972*	5065*	4312*	3738*	3291*	2941*	
			SDB raised	10306*	7748*	6198*	5157*	4398*	3752*	3257*	2870*	2565*	

The specified max. loading capacities in kilograms (kg) include a stability of 25% or are calculated at 87% of the hydraulic lifting power, as per ISO10567. These values are applicable at the tip of the arm with optimum positioning of the corresponding arm system. Weights of attached load carrying accessories (grab, magnet, load hook, etc.) are not included with the load carrying values. *Value limited due to excavator stability.

WORK AREAS 150W

Adjustable Boom, Base arm 1.87 m (C6.41) and Boom 3.62 m (C6.461)

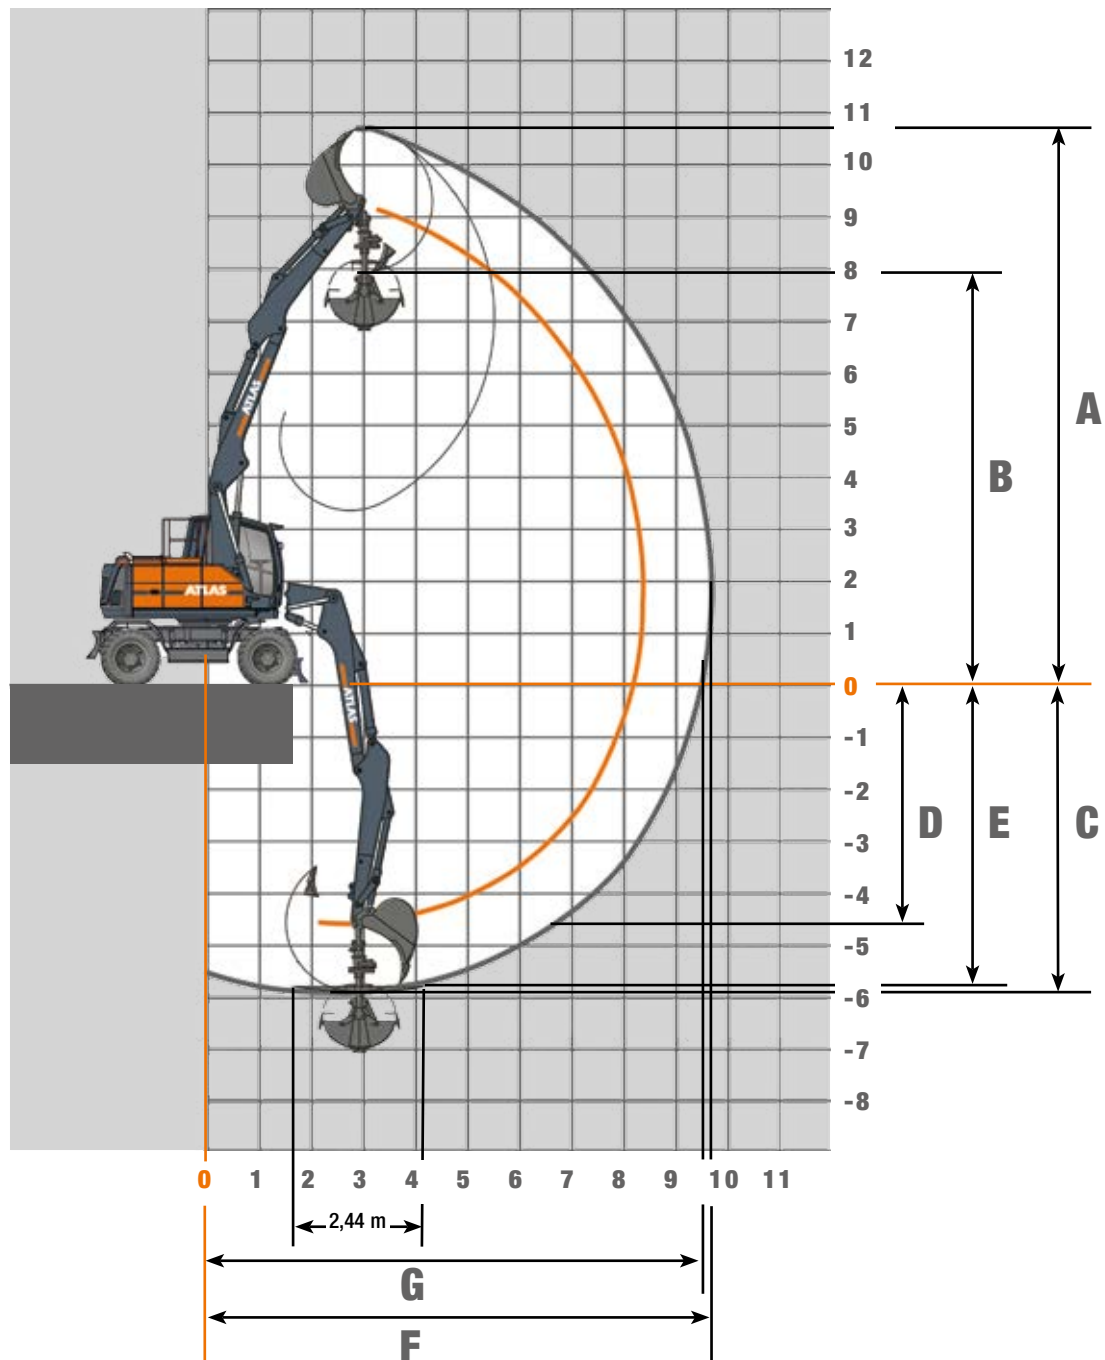

STICK LENGTHS	2.15 m (D6.2)	2.65 m (D6.3)
A Max. cut-in height	10.30 m	10.75 m
B Max. pouring height	6.45 m	7.95 m
C Max. trench depth	5.35 m	5.96 m
D Max. vertical tapping depth	4.10 m	4.70 m
E Max. trench depth with 2.44-metre-wide base	5.20 m	5.80 m
F Max. reach	8.25 m	9.75 m
G Max. reach in the standing plane	8.10 m	9.60 m
Max. bucket digging force	130 kN	130 kN
Max. stick digging force	82 kN	72 kN

Unit is equipped with standard adjustable boom: base arm 1.87 m (C6.41) and boom 3.62 m (C6.461).

LIFTING CAPACITIES 150W

Lifting capacities Adjustable boom: Base arm 1.87 m (C6.41) and boom 3.62 m (C6.461) with stick 2.15 m (D6.2). Max reach 8.70 m


Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m
+6.0 m	FRONT		SDB rear, supported		5424	4989	4646	4374	4155	3985	3880		
			SDB front, raised		5424	4989	4646	4374	4155	3985	3880		
	LATERAL		SDB supported		5424	4989	4646	4374	4112*	3618*	3113*		
			SDB raised		5424	4989	4646	4212*	3674*	3198*	2730*		
+5.0 m	FRONT		SDB rear, supported	6246	6035	5411	4939	4571	4276	4037	3842	3693	
			SDB front, raised	6246	6035	5411	4939	4571	4276	4037	3842	3693	
	LATERAL		SDB supported	6246	6035	5411	4939	4571	4070*	3606*	3203*	2771*	
			SDB raised	6246	6035	5411	4797	4149*	3640*	3226*	2818*	2427*	
+ 4.0 m	FRONT		SDB rear, supported	6038	6473	6073	5396	4891	4499	4185	3928	3714	3533
			SDB front, raised	6038	6473	6073	5396	4891	4499	4185	3928	3714	3533
	LATERAL		SDB supported	6038	6473	6073	5246*	4549	4007*	3564*	3203*	2809*	2446*
			SDB raised	6038	6473	5479*	4676*	4069*	3589*	3196*	2845*	2465*	2136*
+ 3.0 m	FRONT		SDB rear, supported	5913	6307	6344	5887	5240	4748	4360	4043	3777	3542
			SDB front, raised	5913	6307	6344	5887	5240	4748	4360	4043	3777	3541*
	LATERAL		SDB supported	5913	6307	5979*	5119	4463*	3944*	3527*	3186*	2803*	2453*
			SDB raised	5913	6307	5317*	4566*	3989*	3536*	3168*	2833*	2459*	2142*
+ 2.0 m	FRONT		SDB rear, supported	6941	7225	7110	6722	6207	5490	4935	4493	4129	3820
			SDB front, raised	6941	7225	7110	6722	6207	5490	4935	4493	4129	3820
	LATERAL		SDB supported	6941	7225	7069*	5894*	5046*	4405	3907*	3505*	3168*	2765*
			SDB raised	6941	7225	6255*	5243	4505*	3946	3505*	3160*	2784*	2421*
+ 1.0 m	FRONT		SDB rear, supported	7072	8254	7777	7104	6242	5543	4983	4523	4139	3815
			SDB front, raised	7072	8254	7777	7104	6242	5543	4983	4523	4139	3815
	LATERAL		SDB supported	7072	8254	7083*	5889	5038*	4401*	3910*	3536*	3088*	2704*
			SDB raised	7072	7776*	6261*	5239	4497*	3948*	3521*	3126*	2706*	2362*
+ 0 m	FRONT		SDB rear, supported	9149	9544	8393	7186	6262	5552	4988	4529	4153	3861
			SDB front, raised	9149	9544	8393	7186	6262	5552	4988	4529	4153	3861
	LATERAL		SDB supported	9149	9003	7156*	5942*	5085	4453*	3915*	3430*	2992*	2635*
			SDB raised	9149	7753*	6251*	5224*	4471*	3891*	3426*	3002*	2613*	2295*
-1.0 m	FRONT		SDB rear, supported	12517	10317	8533	7270	6333	5614	5048	4616	4221	3640
			SDB front, raised	12517	10317	8533	7270	6333	5614	5048	4616	4221	3640
	LATERAL		SDB supported	12227*	9014*	7138*	5902*	5020*	4356*	3803*	3303*	2899*	2584*
			SDB raised	10070*	7594*	6095*	5084*	4351*	3791*	3316*	2878*	2522*	2245*
- 2.0 m	FRONT		SDB rear, supported	13226	10509	8706	7430	6495	5817	5171	4489	3632	
			SDB front, raised	13226	10509	8706	7430	6495	5817	5171	4489	3632	
	LATERAL		SDB supported	12199*	8958*	7073*	5839*	4968*	4245*	3664*	3214*	2861*	
			SDB raised	10045*	7542*	6034*	5024*	4301*	3684*	3181*	2791*	2485*	

Lifting capacities Adjustable boom: Base arm 1.87 m (C6.41) and boom 3.62 m (C6.461) with stick 2.65 m (D6.3). Max reach 9.20 m

Height	Undercarriage type		2.5 m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	5.5 m	6.0 m	6.5 m	7.0 m	7.5 m	8.0 m
+5.0 m	FRONT		SDB rear, supported		4489	4774	4595	4283	4027	3815	3638	3491	3373	
			SDB front, raised		4489	4774	4595	4283	4027	3815	3638	3491	3373	
	LATERAL		SDB supported		4489	4774	4595	4283	4027	3620*	3231*	2885*	2511*	
			SDB raised		4489	4774	4595	4183*	3662*	3241*	2894*	2540*	2198*	
+4.0 m	FRONT		SDB rear, supported	6276	6412	5630	5057	4618	4270	3989	3755	3558	3390	2778
			SDB front, raised	6276	6412	5630	5057	4618	4270	3989	3755	3558	3390	2778
	LATERAL		SDB supported	6276	6412	5630	5057	4567*	4011*	3567*	3199*	2891*	2543*	2223*
			SDB raised	6276	6412	5536*	4712*	4086*	3592*	3194*	2869*	2563*	2229*	1938*
+ 3.0 m	FRONT		SDB rear, supported	6044	6417	6376	5584	5000	4551	4193	3900	3655	3442	3248
			SDB front, raised	6044	6417	6376	5584	5000	4551	4193	3900	3655	3442	3232
	LATERAL		SDB supported	6044	6417	6002*	5126*	4458*	3931*	3509*	3162*	2874*	2537*	
			SDB raised	6044	6376*	5338*	4569*	3986*	3521*	3149*	2841*	2552*	2224*	1943*
+ 2.0 m	FRONT		SDB rear, supported	7134	7311	7080	6737	6007	5320	4790	4370	4026	3737	3249
			SDB front, raised	7134	7311	7080	6737	6007	5320	4790	4370	4026	3737	3249
	LATERAL		SDB supported	7134	7311	7025*	5862*	5019*	4374*	3871*	3469*	3138*	2854*	2501*
			SDB raised	7134	7311	6222*	5216*	4479*	3917*	3473*	3115*	2829*	2508*	2189*
+ 1.0 m	FRONT		SDB rear, supported	8017	7926	7571	7008	6172	5472	4914	4461	4084	3762	3250
			SDB front, raised	8017	7926	7571	7008	6172	5472	4914	4461	4084	3762	3183*
	LATERAL		SDB supported	8017	7926	6995*	5814*	4977	4344*	3849*	3462*	3155*	2782*	2466*
			SDB raised	8017	7662*	6177*	5167*	4442*	3890*	3459*	3117*	2804*	2437*	2134*
+ 0 m	FRONT		SDB rear, supported	9306	9015	8143	7067	6166	5468	4912	4457	4079	3762	3123
			SDB front, raised	9306	9015	8143	7067	6166	5468	4912	4457	4079	3762	3123
	LATERAL		SDB supported	9306	8834	7037	5841*	4992*	4364*	3881	3490*	3073*	2692*	2381*
			SDB raised	9306	7736	6220*	5197*	4465	3915*	3445*	3058*	2690*	2349*	2071*
-1.0 m	FRONT		SDB rear, supported	11528	9990	8366	7131	6213	5505	4944	4490	4124	3831	3377
			SDB front, raised	11528	9990	8366	7131	6213	5505	4944	4490	4124	3831	3377
	LATERAL		SDB supported	11528	8978*	7145*	5908*	5023*	4356*	3832*	3378*	2952*	2606*	2330*
			SDB raised	10054*	7594*	6100*	5088*	4352*	3790*	3343*	2950*	2572*	2265*	2020*
-2.0 m	FRONT		SDB rear, supported	12904	10279	8510	7255	6323	5610	5070	4632	4131	3457	
			SDB front, raised	12904	10279	8510	7255	6323	5610	5070	4632	4131	3457	
	LATERAL		SDB supported	12109*	8901*	7032*	5804*	4934*	4283*	3719*	3239*	2860*	2556*	
			SDB raised	9958*	7486*	5992*	4989*	4266*	3719*	3233*	2814*	2482*	2216*	
- 3.0 m	FRONT		SDB rear, supported	13292	10597	8806	7554	6583	5735	4940	4102	3030		
			SDB front, raised	13292	10597	8806	7554	6583	5735	4940	4102	3030		
	LATERAL		SDB supported	12148*	8908*	7025*	5798*	4875*	4158*	3607*	3176*	2839*		
			SDB raised	9994*	7492*	5986*	4983*	4209*	3598*	3124*	2753*	2461*		


DIMENSIONS 150W

150W Transport position

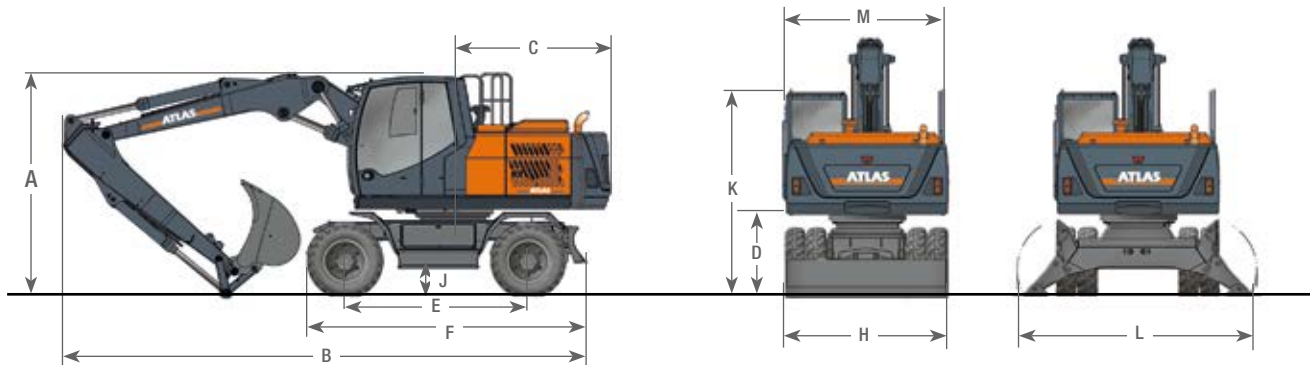

A	TRANSPORT HEIGHT (with bucket)		
	Adjustable boom* with stick 2.15 m	3.15 m	C TAIL SWING RADIUS.....2.24 m
	Adjustable boom* with stick 2.65 m	3.15 m	D CLEARANCE UNDER COUNTERWEIGHT.....1.27 m
	Monoblock boom 4.32 m with stick 2.15 m.....	3.15 m	E WHEEL BASE.....2.60 m
	Monoblock boom 4.32 m with stick 2.65 m.....	3.15 m	F UNDERCARRIAGE LENGTH4.08 m
B	TRANSPORT LENGTH		H DOZER BLADE WIDTH2.54 m
	Adjustable boom* with stick 2.15 m	7.76 m	J GROUND CLEARANCE.....0.45 m
	Adjustable boom* with stick 2.65 m	8.90 m	K OVERALL HEIGHT OF CAB3.15 m
	Monoblock boom 4.32 m with stick 2.15 m.....	7.60 m	L OUTRIGGERS WIDTH (extended).....3.50 m
	Monoblock boom 4.32 m with stick 2.65 m.....	7.60 m	M OVERALL WIDTH OF SUPERSTRUCTURE.....2.49 m

* Adjustable boom: Base arm 1.87 m (C6.41) and boom 3.10 m (C6.46)

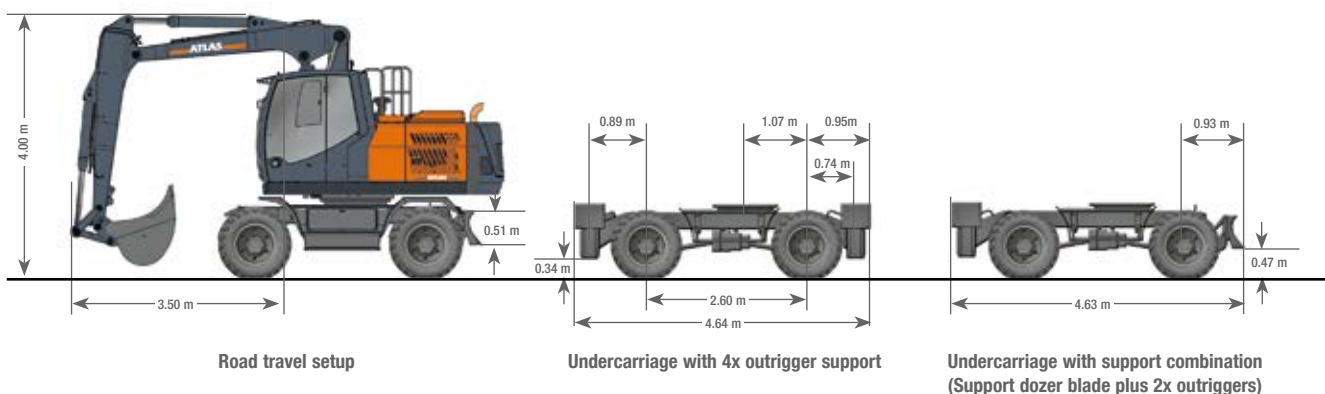

Road travel setup

Undercarriage with 4x outrigger support

Undercarriage with support combination
(Support dozer blade plus 2x outriggers)



150W-EN(1) Effective date: 04/2020. Product specifications and prices are subject to change without notice or obligation. The photographs and/or drawings in this document are for illustrative purposes only. Refer to the appropriate Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using our equipment or to otherwise act irresponsibly may result in serious injury or death. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. The only warranty applicable to our equipment is the standard written warranty applicable to the particular product and sale and Atlas makes no other warranty, express or implied. Products and services listed may be trademarks, service marks or trade-names of Atlas GmbH and/or its subsidiaries. All rights are reserved. Atlas® is a registered trademark of Atlas GmbH. Copyright © 2018 Atlas GmbH. Ref. no. 6185944

GANDERKESEE FACTORY

Atlas GmbH
Atlasstraße 6
D-27777 Ganderkesee,
Germany

Tel.: +49 (0) 4222 954 0
Fax: +49 (0) 4222 954 220
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



VECHTA FACTORY

Atlas GmbH
Theodor-Heuss-Str. 3
D-49377 Vechta
Germany

T: +49 (0) 4441 954 0
F: +49 (0) 4441 954 299
E-mail: info@atlasgmbh.com
www.atlasgmbh.com



DELMENHORST FACTORY

Atlas GmbH
Stedinger Straße 324
D-27751 Delmenhorst
Germany

T: +49 (0) 4221 49 10
F: +49 (0) 4221 49 14 43
E-mail: info@atlasgmbh.com
www.atlasgmbh.com

ATLAS CRANES UK LTD NATIONAL SALES & SERVICE FACILITY

Wharfedale Road,
Euroway Trading Est.
Bradford, England BD4 6SL
United Kingdom
T: +44 8444 99 66 88
F: +44 1274 65 37 85
E-mail: atlasuk@atlasgmbh.com
www.atlas-cranes.co.uk
www.atlasgmbh.com



ATLAS
SINCE 1919

