



Dynapac DFP7AX


Plate compactors





Technical data

 Masses	
Basic mass	74 kg
Operating mass (CE)	82 kg

 Traction	
Max. gradeability	30 %
Max. working speed	30 m/min

 Compaction	
Frequency	100 Hz
Centrifugal force (front/rear)	12 kN
Amplitude (front/rear)	1.02 mm

 Engine	
Manufacturer/Model	Honda GX 120
Emissions according to	CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel	Gasoline
Fuel consumption /h, avg.	0.9 l
Fuel tank capacity	2 l
Power	2.6 kW at 3600 rpm
Water tank capacity	13.5 l

 Drive system	
Drive system	Mechanical

Find us locally at www.dynapac.com


We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DFP7AX

Plate compactors



Technical data

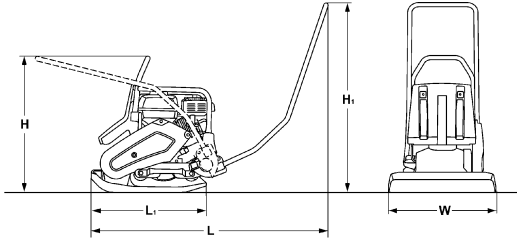

Dimensions	
H. Height	658 mm
H1. Height	962 mm
H2. Height	700 mm
L. Length	1084 mm
L1. Length	545 mm
W. Basic plate width	500 mm



Standard equipment

- Base plate in highly wear resistant material
- Water sprinkler system
- Foldable steering handle with vibration insulation
- Detachable steering handle
- Automatic shutdown at low oil level
- Heavy-duty centrifugal clutch
- Engine protection frame
- V-belt protection cover
- Recoil starter
- Carrying handles
- One point lift



Optional equipment

- Comfort handle
- Comfort handle, center mount
- Steering handle, center mount
- Transport wheels (+5 kg)
- Tool kit
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.