

Dynapac DFP9

Plate compactors



Technical data



Masses

Basic mass	90 kg
Operating mass (CE)	91 kg



Traction

Max. gradeability	30 %
Max. working speed	25 m/min



Compaction

Frequency	90 Hz
Centrifugal force (front/rear)	18 kN
Amplitude (front/rear)	1.24 mm
Water tank volume	7.0 l



Engine

Manufacturer/Model	Honda GX 160
Emissions according to	CARB Phase III
Type	Air cooled gasoline
Number of cylinders	1
Fuel consumption /h, avg.	1.1 l
Fuel tank capacity	3.1 l
Power	3.6 kW at 3600 rpm



Drive system

Drive system	Mechanical
--------------	------------


Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

Dynapac DFP9

Plate compactors

Technical data

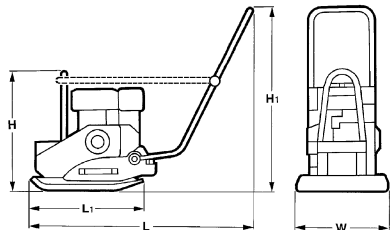

Dimensions	
H. Height	535 mm
H1. Height	915 mm
L. Length	1115 mm
L1. Length	558 mm
W. Basic plate width	450 mm



Standard equipment

- Base plate in highly wear resistant material
- Foldable steering handle with vibration insulation
- Detachable steering handle
- Automatic shutdown at low oil level
- V-belt protection cover
- Recoil starter
- Carrying handles
- One point lift



Optional equipment

- Comfort handle
- Water sprinkler system (+10 kg)
- Transport wheels (+4 kg)
- Plastic mat
- Service Kit

Find us locally at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.