


### Tandem-Low bed trailer (loading area above axle) with slide in aluminium ramps

Weights:	total weight thereof tongue weight maximum payload in standard model approx. empty weight approx.	11900 kg 1000 kg 9400 kg 2500 kg
Measures:	loading area inside approx. (length x width) side height loading height empty approx. drawbar length approx coupling height empty approx. total measures length x width approx.	5000 x 2450 mm 400 mm 880 mm 1800 mm max. ca. 1020 mm 7000 x 2550 mm
Ramps:	length approx. width approx. elevation approx.	3500 mm 400 mm 14° degrees
Tyres:	size	235/75 R 17,5 4-times

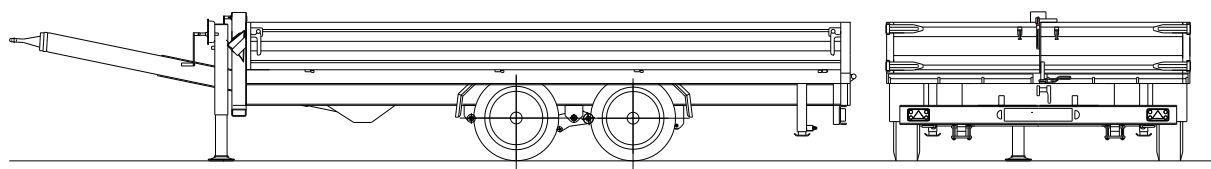

<b>Axles:</b>	Fast-running BPW axles with cam brakes, maintenance-free parabolic spring assembly and weight adjustment
<b>Brakes:</b>	Pressure air brake <b>EBS (24V) with TEM</b> (automatic park brake), testing sockets, connection hoses with mix-up safe couplings and <b>spring-loaded brakes</b>
<b>Drawbar:</b>	Drawbar made of hot-manufactured steel shade of quality S355, continuously adjustable with a winch, with a truck drawbar eye (40mm), adjustable in the height from approx. 0,72cm up to 1,02m
<b>Chassis frame:</b>	sturdy electro welded steel construction made profile steel (IPE and UNP profiles of the quality S355); through short distances between the cross beams for high punctual load appropriate
<b>Upper body:</b>	Steel sidewalls laser welded; front wall fixed, sidewalls are swingable and removable; back wall as a double door; rear posts with double door removable; lashing eyes in the front corners with 4000daN, in the back lashing cases with 4000daN; lashing rings with 2500daN (approx. 1,25m in between) embedded in the side profiles; Double wooden bottom: under-floor made of spruce wood with tongue and groove, 34mm strong as the top layer is made of 18mm strong film coated plywood
<b>Support:</b>	10t support winch in front with load and fast gear; two parking supports in the rear corner posts with a safety-catch
<b>Ramps:</b>	Aluminium loading ramps, can be stored below the loading area; supported by rolls; can be locked by a strong steel valve; bearing load/pair 8000kg; weight approx. 59 kg a piece; incl. the storing device in the chassis
<b>Electric:</b>	Splash water resistant lighting according to ECE-directive ECE-R 48.03 (Multi-chamber light, attached on the steel frame, <b>LED-track-</b> , position- and marker lights sideways); 24 voltage, 7+7 - or 15-poles depending on customer's request
<b>Varnishing:</b>	Steel parts are steelgrain-blasted, pretreatment with iron phosphate; corrosion blocking zinc phosphate-base coat, electro statically primed and varnished in Acryl-RAL customer chosen colour (High-Solid), then cavity sealing with conserving wax
<b>Accessories:</b>	Two brake shoes with support, contour marking in accordance with ECE-R 104